

Artemide[®]

Artemide Presentation


↪ 5

Calipso Linear System 60 Ceiling

Neil Poulton



IP20    Dimmbar: 

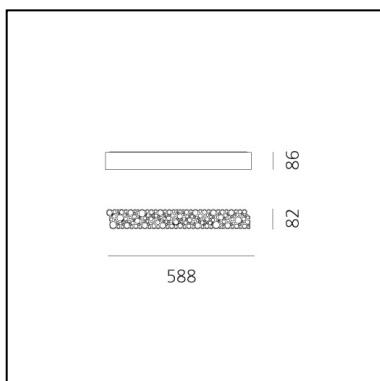

LUMINAIRE

- Watt: **22W**
- Lichtstrom (lm): **1492lm**
- CCT: **3000K**
- Efficiency: **58%**
- Efficacy: **67.84lm/W**
- CRI: **90**
- Dimmable Typology: **Push/DALI**

Anmerkungen

APP driver can not be controlled by a DALI dimming/Push system and viceversa.

In any APP configurations there must be only one App module (master) while the others must be DALI.

BESCHREIBUNG

The unique honeycomb grill of Calipso was generated by feeding a photo of the moon into an image-based algorithm found on a seemingly extinct computer. The resulting fractal shape, an impure geometry that displays the irregular beauty of nature, is built from an organic honeycomb of different diameter tubes, seemingly arranged in a random geometry. This honeycomb characterizes the lamp both aesthetically and optically - not only is it visually pleasing, but it also provides an even and comfortable light emission. The result is a highly emotional lighting object that joins together optical and aesthetic intelligence. A product positioned perfectly half-way between home and professional use, Calipso is suited to a variety of applications - expressing Artemide's traditional approach to deliver high performance lighting with a unique and emotional expressiveness.

ARTIKELNUMMER: 2010010A

FUNKTIONEN

- Artikelnummer: **2010010A**
- Farbe: **White**
- Installation: **Deckenleuchte**
- Material: **Technopolymer, aluminium**
- Serie: **Design Collection, Architectural Indoor**
- Anwendungsbereich: **Innenbeleuchtung**
- design: **Neil Poulton**

DIMENSION

- Länge: **cm 58.8**
- Breite: **cm 7.9**
- Höhe: **cm 7.2**

INKLUSIVE LICHTQUELLEN

- Kategorie: **Led**
- Anzahl: **1**
- Watt: **19,4W**
- Lichtstrom (lm): **2400lm**
- Farbtemperatur(K): **3000K**
- CRI: **90**
- Efficacy: **124lm/W**
- Service Life: **50000-L70**

ZUBEHÖR



Intermediate linear joint - Ceiling - It allows to mechanically connect two modules in-line
2025010A



End cap kit - Ceiling (2 pcs) 2026010A




Joint 90° kit - Ceiling (dx+sx) - It allows to mechanically connect two modules at 90°
2027010A

Calipso Linear System 120 Ceiling

Neil Poulton



IP20    Dimmbar: 

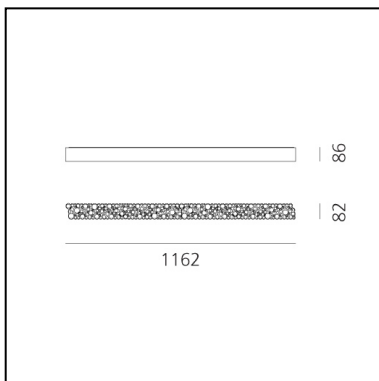

LUMINAIRE

- Watt: **43W**
- Lichtstrom (lm): **2985lm**
- CCT: **3000K**
- Efficiency: **58%**
- Efficacy: **69.41lm/W**
- CRI: **90**
- Dimmable Typology: **Push/DALI**

Anmerkungen

APP driver can not be controlled by a DALI dimming/Push system and viceversa.
In any APP configurations there must be only one App module (master) while the others must be DALI.

BESCHREIBUNG

The unique honeycomb grill of Calipso was generated by feeding a photo of the moon into an image-based algorithm found on a seemingly extinct computer. The resulting fractal shape, an impure geometry that displays the irregular beauty of nature, is built from an organic honeycomb of different diameter tubes, seemingly arranged in a random geometry. This honeycomb characterizes the lamp both aesthetically and optically - not only is it visually pleasing, but it also provides an even and comfortable light emission. The result is a highly emotional lighting object that joins together optical and aesthetic intelligence. A product positioned perfectly half-way between home and professional use, Calipso is suited to a variety of applications - expressing Artemide's traditional approach to deliver high performance lighting with a unique and emotional expressiveness.

ARTIKELNUMMER: 2011010A

FUNKTIONEN

- Artikelnummer: **2011010A**
- Farbe: **White**
- Installation: **Deckenleuchte**
- Material: **Technopolymer, aluminium**
- Serie: **Design Collection, Architectural Indoor**
- Anwendungsbereich: **Innenbeleuchtung**
- design: **Neil Poulton**

DIMENSION

- Länge: **cm 116.2**
- Breite: **cm 7.9**
- Höhe: **cm 7.2**

INKLUSIVE LICHTQUELLEN

- Kategorie: **Led**
- Anzahl: **1**
- Watt: **39W**
- Lichtstrom (lm): **4800lm**
- Farbtemperatur(K): **3000K**
- CRI: **90**
- Efficacy: **123lm/W**
- Service Life: **50000-L70**

ZUBEHÖR



Intermediate linear joint - Ceiling - It allows to mechanically connect two modules in-line
2025010A



End cap kit - Ceiling (2 pcs) 2026010A




Joint 90° kit - Ceiling (dx+sx) - It allows to mechanically connect two modules at 90°
2027010A

Calipso Linear System 180 Ceiling

Neil Poulton



IP20    Dimmbar: 

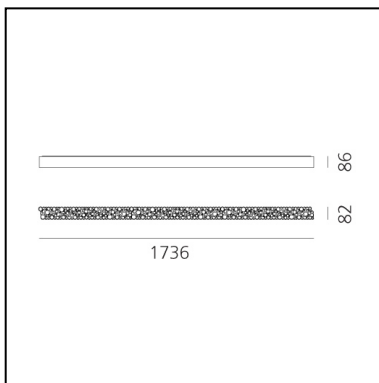

LUMINAIRE

- Watt: **63W**
- Lichtstrom (lm): **4477lm**
- CCT: **3000K**
- Efficiency: **58%**
- Efficacy: **71.07lm/W**
- CRI: **90**
- Dimmable Typology: **Push/DALI**

Anmerkungen

APP driver can not be controlled by a DALI dimming/Push system and viceversa.
In any APP configurations there must be only one App module (master) while the others must be DALI.

BESCHREIBUNG

The unique honeycomb grill of Calipso was generated by feeding a photo of the moon into an image-based algorithm found on a seemingly extinct computer. The resulting fractal shape, an impure geometry that displays the irregular beauty of nature, is built from an organic honeycomb of different diameter tubes, seemingly arranged in a random geometry. This honeycomb characterizes the lamp both aesthetically and optically - not only is it visually pleasing, but it also provides an even and comfortable light emission. The result is a highly emotional lighting object that joins together optical and aesthetic intelligence. A product positioned perfectly half-way between home and professional use, Calipso is suited to a variety of applications - expressing Artemide's traditional approach to deliver high performance lighting with a unique and emotional expressiveness.

ARTIKELNUMMER: 2012010A

FUNKTIONEN

- Artikelnummer: **2012010A**
- Farbe: **White**
- Installation: **Deckenleuchte**
- Material: **Technopolymer, aluminium**
- Serie: **Design Collection, Architectural Indoor**
- Anwendungsbereich: **Innenbeleuchtung**
- design: **Neil Poulton**

DIMENSION

- Länge: **cm 173.6**
- Breite: **cm 7.9**
- Höhe: **cm 7.2**

INKLUSIVE LICHTQUELLEN

- Kategorie: **Led**
- Anzahl: **1**
- Watt: **58,3W**
- Lichtstrom (lm): **7200lm**
- Farbtemperatur(K): **3000K**
- CRI: **90**
- Efficacy: **123lm/W**
- Service Life: **50000-L70**

ZUBEHÖR



Intermediate linear joint - Ceiling - It allows to mechanically connect two modules in-line
2025010A



End cap kit - Ceiling (2 pcs) 2026010A




Joint 90° kit - Ceiling (dx+sx) - It allows to mechanically connect two modules at 90°
2027010A

Calipso Linear System 120 Ceiling - APP Compatible

Neil Poulton



IP20    Dimmbar: 

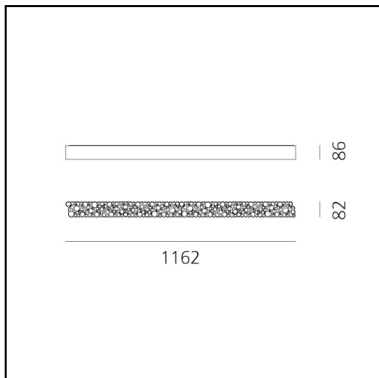

LUMINAIRE

- Watt: **43W**
- Lichtstrom (lm): **2985lm**
- CCT: **3000K**
- Efficiency: **58%**
- Efficacy: **69.41lm/W**
- CRI: **90**
- Dimmable Typology: **Push & APP**

Anmerkungen

APP driver can not be controlled by a DALI dimming/Push system and viceversa.
In any APP configurations there must be only one App module (master) while the others must be DALI.

BESCHREIBUNG

The unique honeycomb grill of Calipso was generated by feeding a photo of the moon into an image-based algorithm found on a seemingly extinct computer. The resulting fractal shape, an impure geometry that displays the irregular beauty of nature, is built from an organic honeycomb of different diameter tubes, seemingly arranged in a random geometry. This honeycomb characterizes the lamp both aesthetically and optically - not only is it visually pleasing, but it also provides an even and comfortable light emission. The result is a highly emotional lighting object that joins together optical and aesthetic intelligence. A product positioned perfectly half-way between home and professional use, Calipso is suited to a variety of applications - expressing Artemide's traditional approach to deliver high performance lighting with a unique and emotional expressiveness.

ARTIKELNUMMER: 2011010APP

FUNKTIONEN

- Artikelnummer: **2011010APP**
- Farbe: **White**
- Installation: **Deckenleuchte**
- Material: **Technopolymer, aluminium**
- Serie: **Design Collection, Architectural Indoor**
- Anwendungsbereich: **Innenbeleuchtung**
- design: **Neil Poulton**

DIMENSION

- Länge: **cm 116.2**
- Breite: **cm 7.9**
- Höhe: **cm 7.2**

INKLUSIVE LICHTQUELLEN

- Kategorie: **Led**
- Anzahl: **1**
- Watt: **39W**
- Lichtstrom (lm): **4800lm**
- Farbtemperatur(K): **3000K**
- CRI: **90**
- Efficacy: **123lm/W**
- Service Life: **50000-L70**

ZUBEHÖR



Intermediate linear joint - Ceiling - It allows to mechanically connect two modules in-line
2025010A



End cap kit - Ceiling (2 pcs) 2026010A




Joint 90° kit - Ceiling (dx+sx) - It allows to mechanically connect two modules at 90°
2027010A

Calipso Linear System 180 Ceiling - APP Compatible

Neil Poulton



IP20    Dimmbar: 

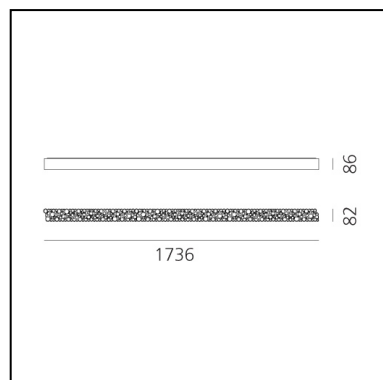

LUMINAIRE

- Watt: **63W**
- Lichtstrom (lm): **4477lm**
- CCT: **3000K**
- Efficiency: **58%**
- Efficacy: **71.07lm/W**
- CRI: **90**
- Dimmable Typology: **Push & APP**

Anmerkungen

APP driver can not be controlled by a DALI dimming/Push system and viceversa.

In any APP configurations there must be only one App module (master) while the others must be DALI.

BESCHREIBUNG

The unique honeycomb grill of Calipso was generated by feeding a photo of the moon into an image-based algorithm found on a seemingly extinct computer. The resulting fractal shape, an impure geometry that displays the irregular beauty of nature, is built from an organic honeycomb of different diameter tubes, seemingly arranged in a random geometry. This honeycomb characterizes the lamp both aesthetically and optically - not only is it visually pleasing, but it also provides an even and comfortable light emission. The result is a highly emotional lighting object that joins together optical and aesthetic intelligence. A product positioned perfectly half-way between home and professional use, Calipso is suited to a variety of applications - expressing Artemide's traditional approach to deliver high performance lighting with a unique and emotional expressiveness.

ARTIKELNUMMER: 2012010APP

FUNKTIONEN

- Artikelnummer: **2012010APP**
- Farbe: **White**
- Installation: **Deckenleuchte**
- Material: **Technopolymer, aluminium**
- Serie: **Design Collection, Architectural Indoor**
- Anwendungsbereich: **Innenbeleuchtung**
- design: **Neil Poulton**

DIMENSION

- Länge: **cm 173.6**
- Breite: **cm 7.9**
- Höhe: **cm 7.2**

INKLUSIVE LICHTQUELLEN

- Kategorie: **Led**
- Anzahl: **1**
- Watt: **58,3W**
- Lichtstrom (lm): **7200lm**
- Farbtemperatur(K): **3000K**
- CRI: **90**
- Efficacy: **123lm/W**
- Service Life: **50000-L70**

ZUBEHÖR



Intermediate linear joint - Ceiling - It allows to mechanically connect two modules in-line
2025010A



End cap kit - Ceiling (2 pcs) 2026010A



Joint 90° kit - Ceiling (dx+sx) - It allows to mechanically connect two modules at 90°
2027010A