

OUTGRAZE 48 L 1200 MM

| | |
|--------------------------|--|
| Insulation class | Class I |
| Beam angle | 14° |
| Mounting | Ceiling surface, Wall surface |
| Lamps description | Power Led: 32W - 3120 lm ≠ *FIXT 2396 lm - 3000K/CRI 80 - 220-240V (*FIXT lm = Medium Optic) |
| Environment | Indoor, Outdoor |
| Notes | We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire. |

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 48 L 1200 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

| | |
|------------|------------|
| ● F4224001 | White |
| ● F4224006 | Grey |
| ● F4224033 | Anthracite |
| ● F4224030 | Black |
| ● F4224018 | Deep Brown |


ELECTRICAL

| | |
|---------------------------------|------------|
| Transformer type | Electronic |
| Transformer availability | Included |
| Transformer mounting | Integral |
| Emergency | Without |
| Voltage (V) | 220/240 |



PHYSICAL

| | |
|------------------------|-------|
| IK rating | 06 |
| Aiming | Fixed |
| Weight (kg) | 4,31 |
| Number of heads | 1 |

DIMENSIONS

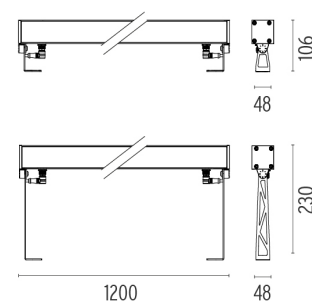

CERTIFICATIONS

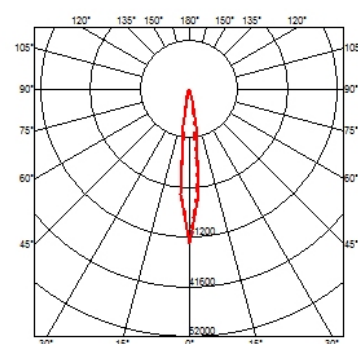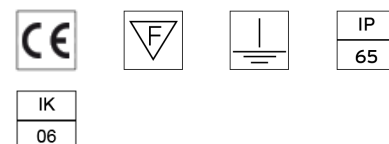




Outgraze 48 L 1200 mm designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4224001 White
- F4224006 Grey
- F4224033 Anthracite
- F4224030 Black
- F4224018 Deep Brown

DIMENSIONS

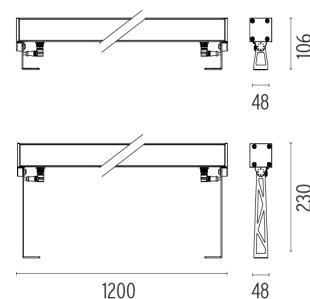

CERTIFICATIONS

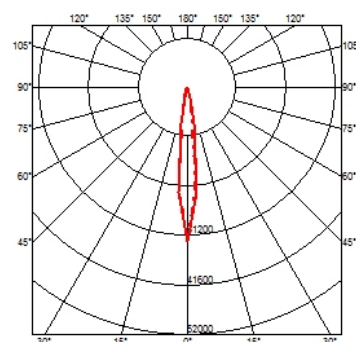

Outgraze 48 L 1200 mm .Accessories

Structural



- F1204001
- F1204006
- F1204033
- F1204030
- F1204018

One pair of long rods L
200 mm.

- F1203001
- F1203006
- F1203033
- F1203030
- F1203018

One pair of short rods L
80 mm.

FLOS

Outgraze 48 L 1200 mm .Accessories

Electrical



○ F1206000

3/4 way terminal block 3 poles IP68

7-12 mm cables



○ F990C00A000

2 way terminal block 3 poles IP68

7-12 mm cables

Outgraze 48 L 1200 mm . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Outgraze 48 L 1200 mm designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4224001 White
- F4224006 Grey
- F4224033 Anthracite
- F4224030 Black
- F4224018 Deep Brown

DIMENSIONS

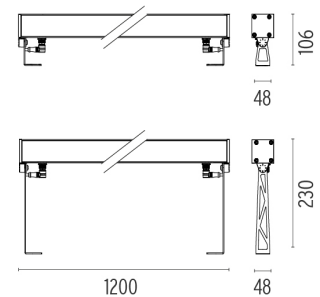

CERTIFICATIONS

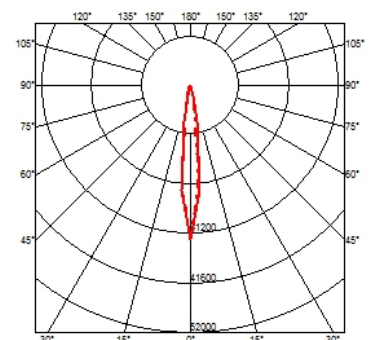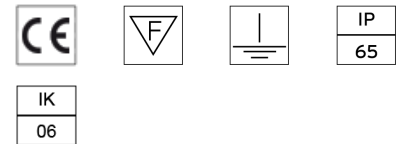

OUTGRAZE 48 L 1200 MM

| | |
|--------------------------|--|
| Insulation class | Class I |
| Beam angle | 13° |
| Mounting | Ceiling surface, Wall surface |
| Lamps description | Power Led: 32W - 3120 lm ≠ *FIXT 2396 lm - 3000K/CRI 80 - 220-240V (*FIXT lm = Medium Optic) |
| Environment | Indoor, Outdoor |
| Notes | We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire. |

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 48 L 1200 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

| | |
|------------|------------|
| ● F4242001 | White |
| ● F4242006 | Grey |
| ● F4242033 | Anthracite |
| ● F4242030 | Black |
| ● F4242018 | Deep Brown |


ELECTRICAL

| | |
|---------------------------------|------------|
| Transformer type | Electronic |
| Transformer availability | Included |
| Transformer mounting | Integral |
| Emergency | Without |
| Voltage (V) | 220/240 |



PHYSICAL

| | |
|------------------------|-------|
| IK rating | 06 |
| Aiming | Fixed |
| Weight (kg) | 4,3 l |
| Number of heads | 1 |

DIMENSIONS

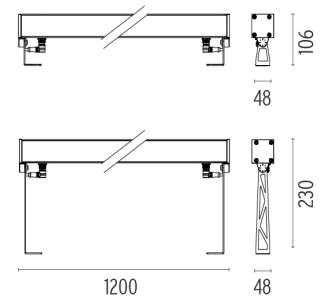

CERTIFICATIONS

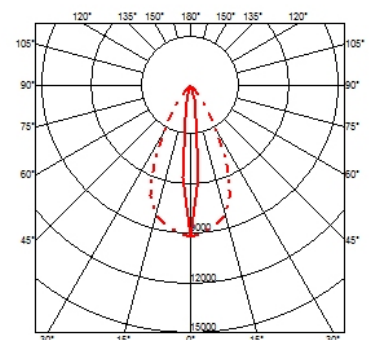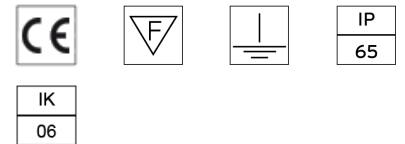




Outgraze 48 L 1200 mm designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4242001 White
- F4242006 Grey
- F4242033 Anthracite
- F4242030 Black
- F4242018 Deep Brown

DIMENSIONS



CERTIFICATIONS

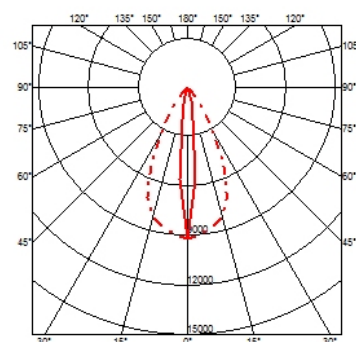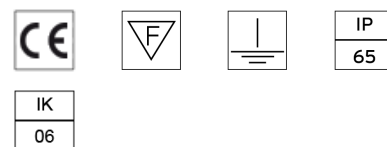

Outgraze 48 L 1200 mm .Accessories

Structural



- F1204001
- F1204006
- F1204033
- F1204030
- F1204018

One pair of long rods L
200 mm.

- F1203001
- F1203006
- F1203033
- F1203030
- F1203018

One pair of short rods L
80 mm.

FLOS

Outgraze 48 L 1200 mm .Accessories

Electrical



○ F1206000

3/4 way terminal block 3 poles IP68

7-12 mm cables



○ F990C00A000

2 way terminal block 3 poles IP68

7-12 mm cables

Outgraze 48 L 1200 mm . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Outgraze 48 L 1200 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4242001 White
- F4242006 Grey
- F4242033 Anthracite
- F4242030 Black
- F4242018 Deep Brown

DIMENSIONS

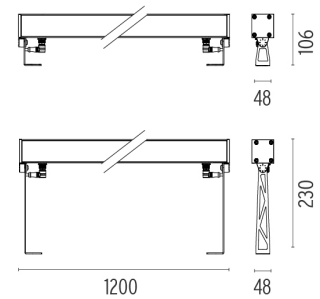

CERTIFICATIONS

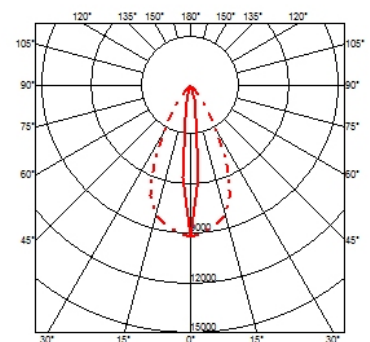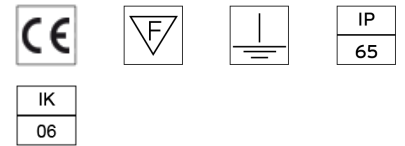

OUTGRAZE 48 L 1200 MM

| | |
|--------------------------|--|
| Insulation class | Class I |
| Beam angle | 44° |
| Mounting | Ceiling surface, Wall surface |
| Lamps description | Power Led: 32W - 3120 lm ≠ *FIXT 2396 lm - 3000K/CRI 80 - 220-240V (*FIXT lm = Medium Optic) |
| Environment | Indoor, Outdoor |
| Notes | We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire. |

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 48 L 1200 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

| | |
|------------|------------|
| ● F4236001 | White |
| ● F4236006 | Grey |
| ● F4236033 | Anthracite |
| ● F4236030 | Black |
| ● F4236018 | Deep Brown |


ELECTRICAL

| | |
|---------------------------------|------------|
| Transformer type | Electronic |
| Transformer availability | Included |
| Transformer mounting | Integral |
| Emergency | Without |
| Voltage (V) | 220/240 |



PHYSICAL

| | |
|------------------------|-------|
| IK rating | 06 |
| Aiming | Fixed |
| Weight (kg) | 4,31 |
| Number of heads | 1 |

DIMENSIONS

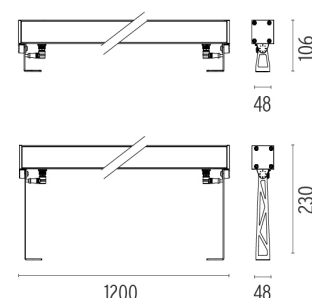

CERTIFICATIONS

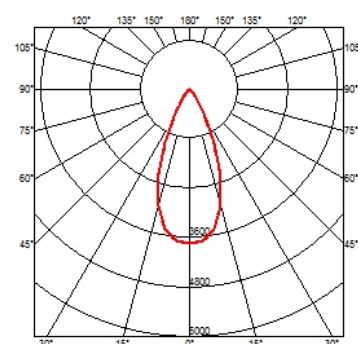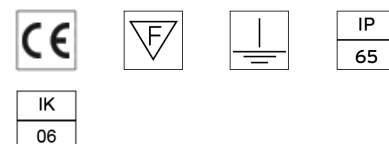



Outgraze 48 L 1200 mm
designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4236001 White
- F4236006 Grey
- F4236033 Anthracite
- F4236030 Black
- F4236018 Deep Brown

Outgraze 48 L 1200 mm .Accessories

Structural




- F1204001
- F1204006
- F1204033
- F1204030
- F1204018

- F1203001
- F1203006
- F1203033
- F1203030
- F1203018



One pair of long rods L 200 mm.

One pair of short rods L 80 mm.

DIMENSIONS

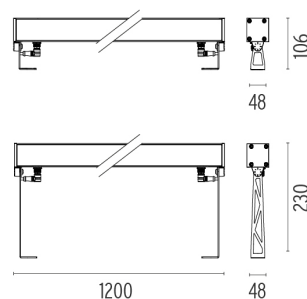

CERTIFICATIONS

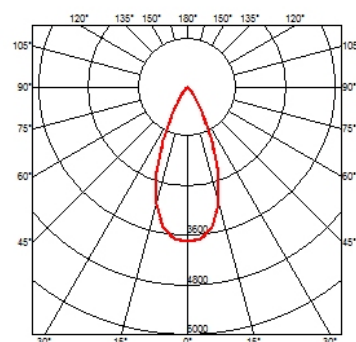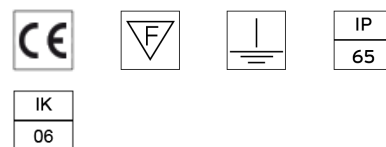

FLOS

Outgraze 48 L 1200 mm .Accessories

Electrical



○ F1206000

3/4 way terminal block 3 poles IP68

7-12 mm cables



○ F990C00A000

2 way terminal block 3 poles IP68

7-12 mm cables

Outgraze 48 L 1200 mm . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Outgraze 48 L 1200 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4236001 White
- F4236006 Grey
- F4236033 Anthracite
- F4236030 Black
- F4236018 Deep Brown

DIMENSIONS

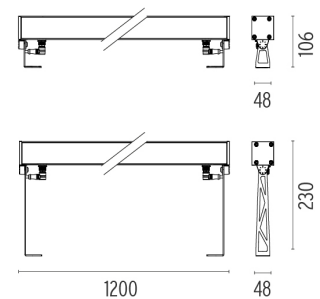

CERTIFICATIONS



OUTGRAZE 48 L 1200 MM

| | |
|--------------------------|--|
| Insulation class | Class I |
| Beam angle | 29° |
| Mounting | Ceiling surface, Wall surface |
| Lamps description | Power Led: 32W - 3120 lm ≠ *FIXT 2396 lm - 3000K/CRI 80 - 220-240V (*FIXT lm = Medium Optic) |
| Environment | Indoor, Outdoor |
| Notes | We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire. |

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 48 L 1200 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

| | |
|------------|------------|
| ● F4230001 | White |
| ● F4230006 | Grey |
| ● F4230033 | Anthracite |
| ● F4230030 | Black |
| ● F4230018 | Deep Brown |


ELECTRICAL

| | |
|---------------------------------|------------|
| Transformer type | Electronic |
| Transformer availability | Included |
| Transformer mounting | Integral |
| Emergency | Without |
| Voltage (V) | 220/240 |



PHYSICAL

| | |
|------------------------|-------|
| IK rating | 06 |
| Aiming | Fixed |
| Weight (kg) | 4,31 |
| Number of heads | 1 |

DIMENSIONS

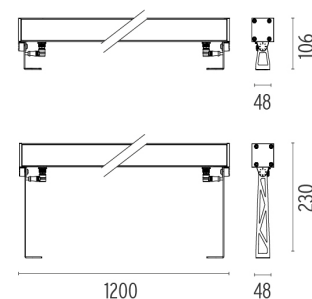

CERTIFICATIONS

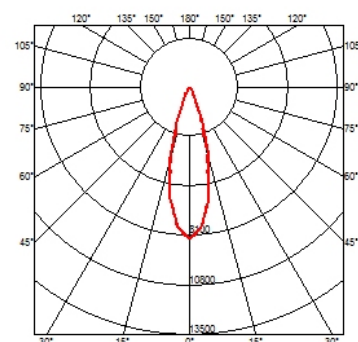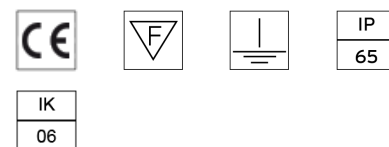



Outgraze 48 L 1200 mm
designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4230001 White
- F4230006 Grey
- F4230033 Anthracite
- F4230030 Black
- F4230018 Deep Brown

Outgraze 48 L 1200 mm .Accessories

Structural




- F1204001
- F1204006
- F1204033
- F1204030
- F1204018

- F1203001
- F1203006
- F1203033
- F1203030
- F1203018



One pair of long rods L 200 mm.

One pair of short rods L 80 mm.

DIMENSIONS

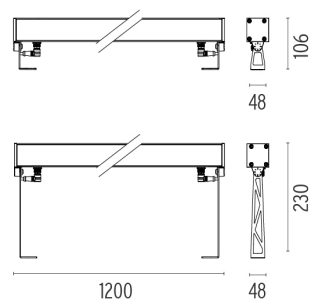

CERTIFICATIONS

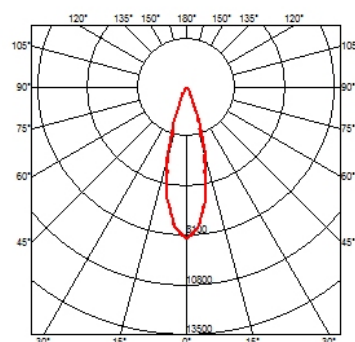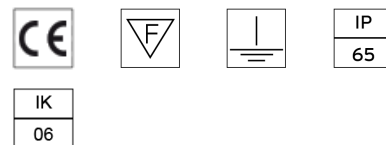

FLOS

Outgraze 48 L 1200 mm .Accessories

Electrical



F1206000

3/4 way terminal block 3 poles IP68

7-12 mm cables



F990C00A000

2 way terminal block 3 poles IP68

7-12 mm cables

Outgraze 48 L 1200 mm . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Outgraze 48 L 1200 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4230001 White
- F4230006 Grey
- F4230033 Anthracite
- F4230030 Black
- F4230018 Deep Brown

DIMENSIONS

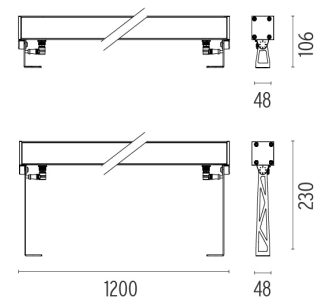

CERTIFICATIONS

