

## OUTGRAZE 35 L 1200 MM



<b>Insulation class</b>	Class III
<b>Beam angle</b>	17°
<b>Mounting</b>	Ceiling surface, Wall surface
<b>Lamps description</b>	Power Led: 30W - 2600 lm ≠ *FIXT 1931 lm - 3000K/CRI 80 - 48V (*FIXT lm = Medium Optic)
<b>Environment</b>	Indoor, Outdoor
<b>Notes</b>	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

<b>Technical description</b>	Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.
------------------------------	---



### Outgraze 35 L 1200 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

	F4266001	White
	F4266006	Grey
	F4266033	Anthracite
	F4266030	Black
	F4266018	Deep Brown


### ELECTRICAL

<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Emergency</b>	Without
<b>Voltage (V)</b>	48


### PHYSICAL

<b>IK rating</b>	07
<b>Aiming</b>	Fixed
<b>Weight (kg)</b>	2,90
<b>Number of heads</b>	1

### DIMENSIONS



### CERTIFICATIONS

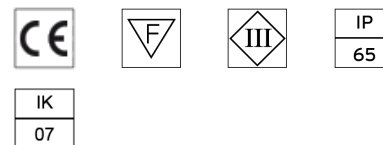




## Outgraze 35 L 1200 mm designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4266001 White
- F4266006 Grey
- F4266033 Anthracite
- F4266030 Black
- F4266018 Deep Brown

### DIMENSIONS



### CERTIFICATIONS

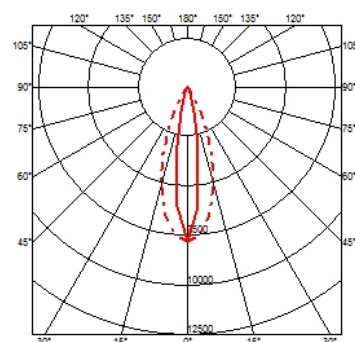

## Outgraze 35 L 1200 mm .Accessories

### Structural



- F1204001
- F1204006
- F1204033
- F1204030
- F1204018


One pair of long rods L  
200 mm.

- F1203001
- F1203006
- F1203033
- F1203030
- F1203018

One pair of short rods L  
80 mm.

## Outgraze 35 L 1200 mm .Accessories

### Power Supply



RF25746

#### Power supply 240W


Power supply 48V 240W / 110-240V single output DIN RAIL.



RF25753

#### Power supply 60W

Power supply 48V 60W / 110-240V IP67 Class I selv eq.



### Outgraze 35 L 1200 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4266001 White
- F4266006 Grey
- F4266033 Anthracite
- F4266030 Black
- F4266018 Deep Brown

### Electrical



F1206000

#### 3/4 way terminal block 3 poles IP68

7-12 mm cables




F990C00A000



#### 2 way terminal block 3 poles IP68

7-12 mm cables

### DIMENSIONS



### CERTIFICATIONS

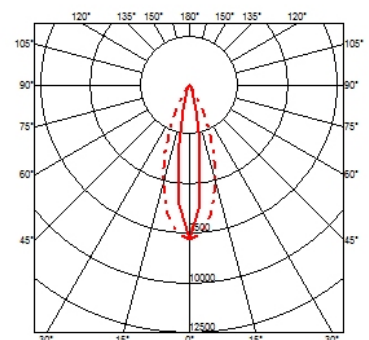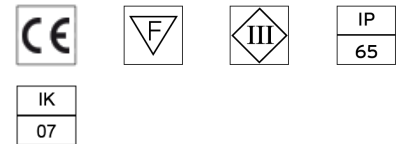

## Outgraze 35 L 1200 mm . Lamps



**Power LED**

**Lamp category:**  
LED

**Socket:**  
Special base

**Lamp type:**  
Power LED




### Outgraze 35 L 1200 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4266001 White
- F4266006 Grey
- F4266033 Anthracite
- F4266030 Black
- F4266018 Deep Brown

### DIMENSIONS

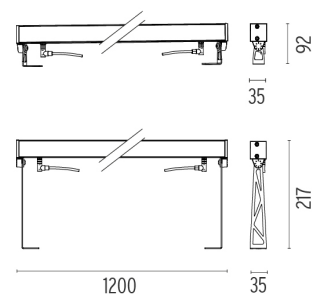

### CERTIFICATIONS

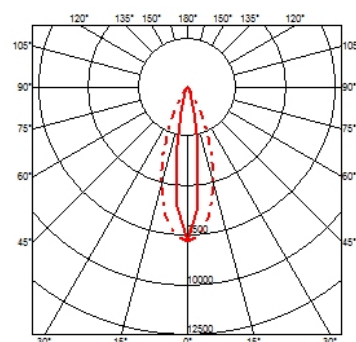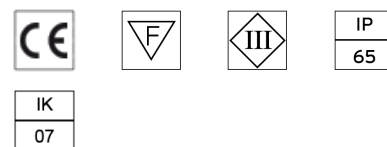

## OUTGRAZE 35 L 1200 MM

<b>Insulation class</b>	Class III
<b>Beam angle</b>	19°
<b>Mounting</b>	Ceiling surface, Wall surface
<b>Lamps description</b>	Power Led: 30W - 2600 lm ≠ *FIXT 1931 lm - 3000K/CRI 80 - 48V (*FIXT lm = Medium Optic)
<b>Environment</b>	Indoor, Outdoor
<b>Notes</b>	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

**Technical description**

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



### Outgraze 35 L 1200 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

● F4248001	White
● F4248006	Grey
● F4248033	Anthracite
● F4248030	Black
● F4248018	Deep Brown


### ELECTRICAL

<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Emergency</b>	Without
<b>Voltage (V)</b>	48



### PHYSICAL

<b>IK rating</b>	07
<b>Aiming</b>	Fixed
<b>Weight (kg)</b>	2,90
<b>Number of heads</b>	1

### DIMENSIONS



### CERTIFICATIONS

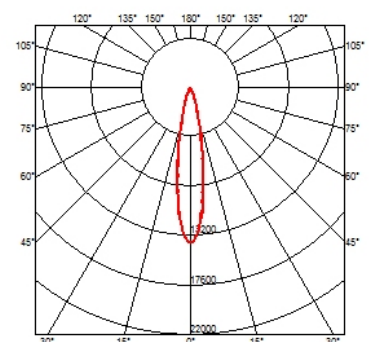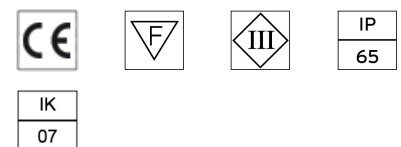




## Outgraze 35 L 1200 mm designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4248001 White
- F4248006 Grey
- F4248033 Anthracite
- F4248030 Black
- F4248018 Deep Brown

### DIMENSIONS



### CERTIFICATIONS

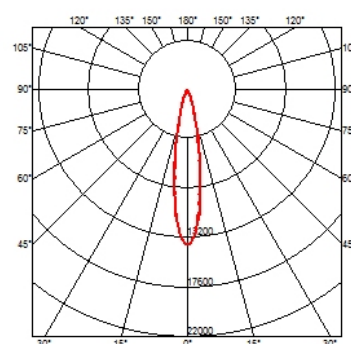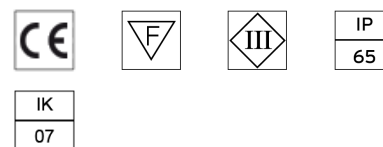

## Outgraze 35 L 1200 mm .Accessories

### Structural



- F1204001
- F1204006
- F1204033
- F1204030
- F1204018



One pair of long rods L 200 mm.

- F1203001
- F1203006
- F1203033
- F1203030
- F1203018

One pair of short rods L 80 mm.

## Outgraze 35 L I 200 mm .Accessories

### Power Supply



RF25746

#### Power supply 240W

Power supply 48V 240W /  
110-240V single output DIN  
RAIL.

RF25753

#### Power supply 60W

Power supply 48V 60W /  
110-240V IP67 Class I selv  
eq.



### Outgraze 35 L I 200 mm

designed by FLOS Outdoor

Luminaire for outdoor use for  
installation on the wall or ceiling with  
LED light source. 48V power source  
not included. Driver for remote  
installation and installation brackets to  
be ordered separately. Dimmable  
PWM luminaires.

- F4248001 White
- F4248006 Grey
- F4248033 Anthracite
- F4248030 Black
- F4248018 Deep Brown

### Electrical



F1206000

#### 3/4 way terminal block 3 poles IP68


7-12 mm cables

F990C00A000



#### 2 way terminal block 3 poles IP68

7-12 mm cables

### DIMENSIONS



### CERTIFICATIONS

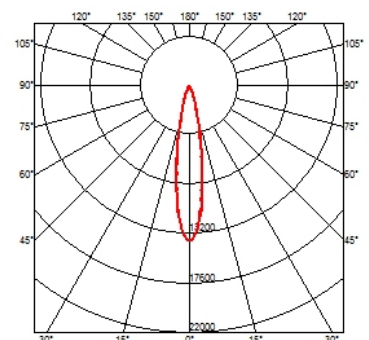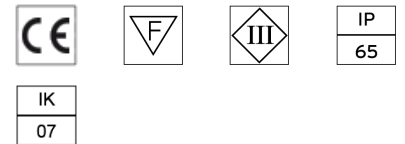

## Outgraze 35 L 1200 mm . Lamps



**Power LED**

**Lamp category:**  
LED

**Socket:**  
Special base

**Lamp type:**  
Power LED




### Outgraze 35 L 1200 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4248001 White
- F4248006 Grey
- F4248033 Anthracite
- F4248030 Black
- F4248018 Deep Brown

### DIMENSIONS



### CERTIFICATIONS

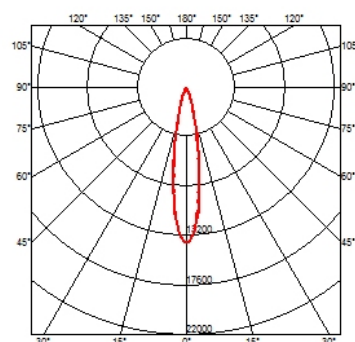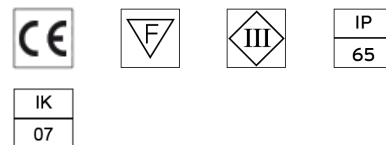



## OUTGRAZE 35 L 1200 MM

<b>Insulation class</b>	Class III
<b>Beam angle</b>	62°
<b>Mounting</b>	Ceiling surface, Wall surface
<b>Lamps description</b>	Power Led: 30W - 2600 lm ≠ *FIXT 1931 lm - 3000K/CRI 80 - 48V (*FIXT lm = Medium Optic)
<b>Environment</b>	Indoor, Outdoor
<b>Notes</b>	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

**Technical description**

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



### Outgraze 35 L 1200 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

● F4260001	White
● F4260006	Grey
● F4260033	Anthracite
● F4260030	Black
● F4260018	Deep Brown


### ELECTRICAL

<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Emergency</b>	Without
<b>Voltage (V)</b>	48



### PHYSICAL

<b>IK rating</b>	07
<b>Aiming</b>	Fixed
<b>Weight (kg)</b>	2,90
<b>Number of heads</b>	1

### DIMENSIONS

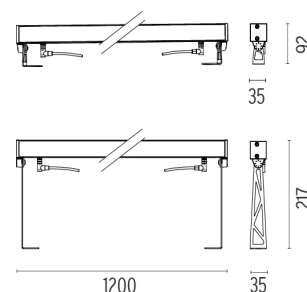

### CERTIFICATIONS

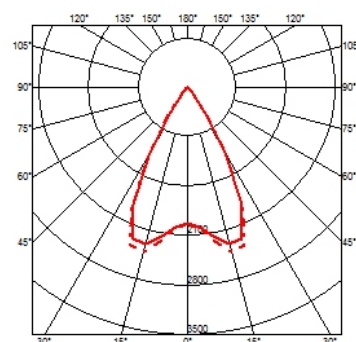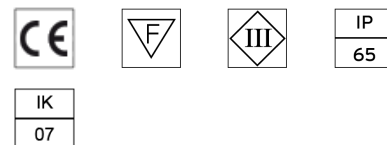




## Outgraze 35 L 1200 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4260001 White
- F4260006 Grey
- F4260033 Anthracite
- F4260030 Black
- F4260018 Deep Brown

## DIMENSIONS



## CERTIFICATIONS

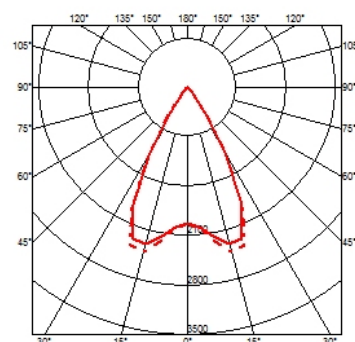

## Outgraze 35 L 1200 mm .Accessories

### Structural



- F1204001
- F1204006
- F1204033
- F1204030
- F1204018


One pair of long rods L 200 mm.

- F1203001
- F1203006
- F1203033
- F1203030
- F1203018

One pair of short rods L 80 mm.

## Outgraze 35 L 1200 mm .Accessories

### Power Supply



RF25746

#### Power supply 240W


Power supply 48V 240W / 110-240V single output DIN RAIL.



RF25753

#### Power supply 60W

Power supply 48V 60W / 110-240V IP67 Class I selv eq.



### Outgraze 35 L 1200 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4260001 White
- F4260006 Grey
- F4260033 Anthracite
- F4260030 Black
- F4260018 Deep Brown

### Electrical



F1206000

#### 3/4 way terminal block 3 poles IP68

7-12 mm cables




F990C00A000



#### 2 way terminal block 3 poles IP68

7-12 mm cables

### DIMENSIONS



### CERTIFICATIONS

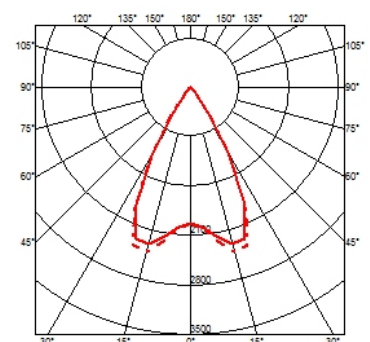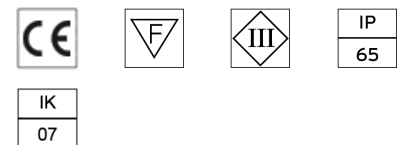

## Outgraze 35 L 1200 mm . Lamps



**Power LED**

**Lamp category:**  
LED

**Socket:**  
Special base

**Lamp type:**  
Power LED




### Outgraze 35 L 1200 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4260001 White
- F4260006 Grey
- F4260033 Anthracite
- F4260030 Black
- F4260018 Deep Brown

### DIMENSIONS

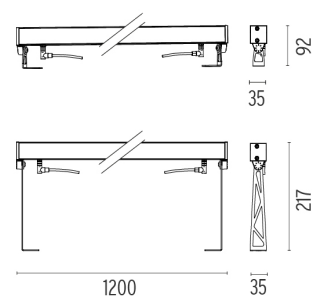

### CERTIFICATIONS

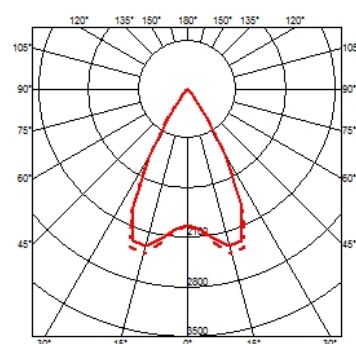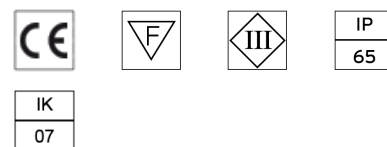

## OUTGRAZE 35 L 1200 MM

<b>Insulation class</b>	Class III
<b>Beam angle</b>	31°
<b>Mounting</b>	Ceiling surface, Wall surface
<b>Lamps description</b>	Power Led: 30W - 2600 lm ≠ *FIXT 1931 lm - 3000K/CRI 80 - 48V (*FIXT lm = Medium Optic)
<b>Environment</b>	Indoor, Outdoor
<b>Notes</b>	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

**Technical description**

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



### Outgraze 35 L 1200 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

● F4254001	White
● F4254006	Grey
● F4254033	Anthracite
● F4254030	Black
● F4254018	Deep Brown


### ELECTRICAL

<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Emergency</b>	Without
<b>Voltage (V)</b>	48



### PHYSICAL

<b>IK rating</b>	07
<b>Aiming</b>	Fixed
<b>Weight (kg)</b>	2,90
<b>Number of heads</b>	1

### DIMENSIONS



### CERTIFICATIONS

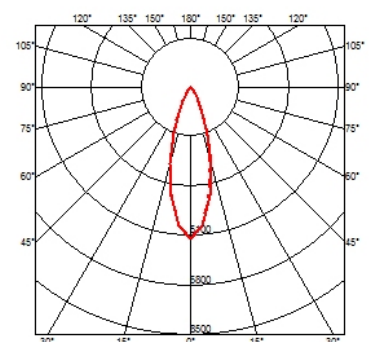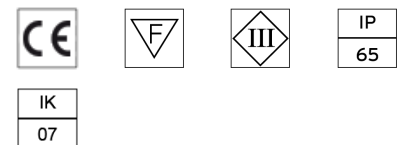




## Outgraze 35 L 1200 mm designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4254001 White
- F4254006 Grey
- F4254033 Anthracite
- F4254030 Black
- F4254018 Deep Brown

### DIMENSIONS



### CERTIFICATIONS

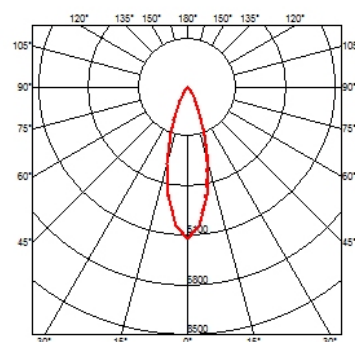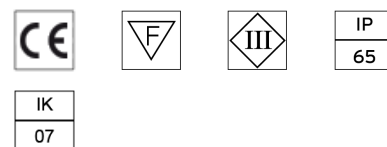

## Outgraze 35 L 1200 mm .Accessories

### Structural



- F1204001
- F1204006
- F1204033
- F1204030
- F1204018


One pair of long rods L 200 mm.

- F1203001
- F1203006
- F1203033
- F1203030
- F1203018

One pair of short rods L 80 mm.

## Outgraze 35 L 1200 mm .Accessories


### Power Supply



○ RF25746

#### Power supply 240W

Power supply 48V 240W /  
110-240V single output DIN  
RAIL.



○ RF25753

#### Power supply 60W

Power supply 48V 60W /  
110-240V IP67 Class I selv  
eq.




### Outgraze 35 L 1200 mm

designed by FLOS Outdoor


Luminaire for outdoor use for  
installation on the wall or ceiling with  
LED light source. 48V power source  
not included. Driver for remote  
installation and installation brackets to  
be ordered separately. Dimmable  
PWM luminaires.

- F4254001 White
- F4254006 Grey
- F4254033 Anthracite
- F4254030 Black
- F4254018 Deep Brown

### DIMENSIONS



### CERTIFICATIONS

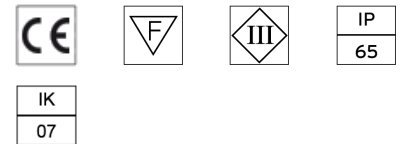

### Electrical



○ F1206000

#### 3/4 way terminal block 3 poles IP68


7-12 mm cables



○ F990C00A000

#### 2 way terminal block 3 poles IP68

7-12 mm cables

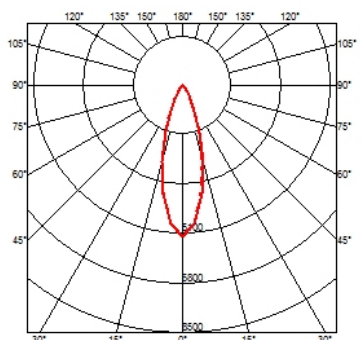

## Outgraze 35 L 1200 mm . Lamps



**Power LED**

**Lamp category:**  
LED

**Socket:**  
Special base






**Lamp type:**  
Power LED




### Outgraze 35 L 1200 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

	F4254001	White
	F4254006	Grey
	F4254033	Anthracite
	F4254030	Black
	F4254018	Deep Brown

### DIMENSIONS



### CERTIFICATIONS

