

MYWAY 110X100

Insulation class	Class I
Beam angle	74°
Mounting	Wall surface
Lamps description	Mid-Power Led: 5W - 490 lm ≠ FIXT 211 lm - 3000K/CRI 80 - 100-240V
Environment	Indoor, Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

Technical description

Aluminum die-cast body EN AB-47100 (low copper content). High-resistance coating: after a sandblasting treatment of all components to make the surface porous and ensure a greater adhesion of the paint, the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Frosted polycarbonate diffuser, UV-stabilised, glued to the head of the product to ensure a watertight seal.



MyWay 110x100

designed by Piero Lissoni

Luminaire for outdoor use for built-in installation on the wall with LED light source. Integrated 110/240V power source. Supplied with a 120 mm section of outgoing neoprene cable and IP67 cable connection system.

● F4351001	White
● F4351006	Grey
● F4351033	Anthracite
● F4351030	Black
● F4351018	Deep Brown


ELECTRICAL

Transformer type	Electronic
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	100/240


PHYSICAL

Aiming	Fixed
Weight (kg)	0,52
Number of heads	1

DIMENSIONS



CERTIFICATIONS

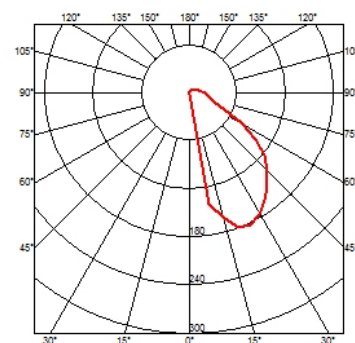




MyWay 110x100

designed by Piero Lissoni


Luminaire for outdoor use for built-in installation on the wall with LED light source. Integrated 110/240V power source. Supplied with a 120 mm section of outgoing neoprene cable and IP67 cable connection system.

- F4351001 White
- F4351006 Grey
- F4351033 Anthracite
- F4351030 Black
- F4351018 Deep Brown

DIMENSIONS



CERTIFICATIONS

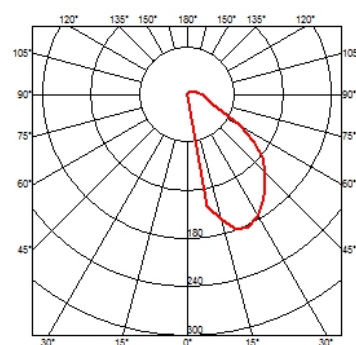

MyWay 110x100 .Accessories

Electrical



F990C00A000

2 way terminal block 3 poles IP68

7-12 mm cables

MyWay 110x100 .Accessories

Mounting



F4301000

Remote Housing




MyWay 110x100

designed by Piero Lissoni

Luminaire for outdoor use for built-in installation on the wall with LED light source. Integrated 110/240V power source. Supplied with a 120 mm section of outgoing neoprene cable and IP67 cable connection system.

- F4351001 White
- F4351006 Grey
- F4351033 Anthracite
- F4351030 Black
- F4351018 Deep Brown

DIMENSIONS



MyWay 110x100 .Lamps





Mid-Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED

CERTIFICATIONS

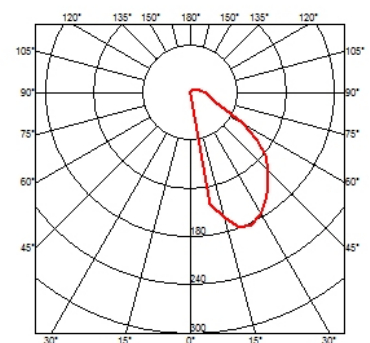

MY WAY 210X200

Insulation class	Class I
Beam angle	85°
Mounting	Wall surface
Lamps description	Mid-Power Led: 13W - 1577 lm ≠ FIXT 777 lm - 3000K/CRI 80 - 220-240V
Environment	Indoor, Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

Technical description
 Aluminum die-cast body EN AB-47100 (low copper content). High-resistance coating: after a sandblasting treatment of all components to make the surface porous and ensure a greater adhesion of the paint, the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Frosted polycarbonate diffuser, UV-stabilised, glued to the head of the product to ensure a watertight seal.

ELECTRICAL

Transformer type	Electronic
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240

PHYSICAL






Aiming	Fixed
Weight (kg)	0,95
Number of heads	1




My Way 210x200

designed by Piero Lissoni


Luminaire for outdoor use for built-in installation on the wall with LED light source. Integrated 220/240V power source. Supplied with a double cable gland in plastic material for 7.5ϕ<math><9.5</math> mm section cables.

	F4357001	White
	F4357006	Grey
	F4357033	Anthracite
	F4357030	Black
	F4357018	Deep Brown

DIMENSIONS



CERTIFICATIONS

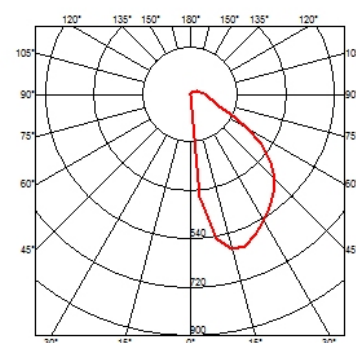




My Way 210x200

designed by Piero Lissoni


Luminaire for outdoor use for built-in installation on the wall with LED light source. Integrated 220/240V power source. Supplied with a double cable gland in plastic material for 7.5ϕ<math><9.5</math> mm section cables.

- F4357001 White
- F4357006 Grey
- F4357033 Anthracite
- F4357030 Black
- F4357018 Deep Brown

DIMENSIONS



CERTIFICATIONS

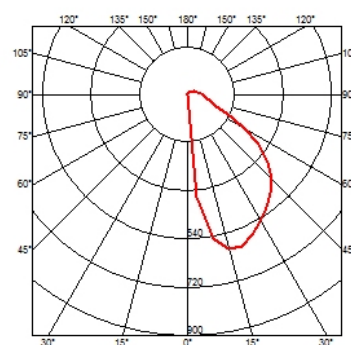

My Way 210x200 .Accessories

Mounting



F4303000

Remote Housing

FLOS

My Way 210x200 . Lamps



Mid-Power LED

Lamp category:
LED

Socket:
Special base






Lamp type:
Power LED




My Way 210x200

designed by Piero Lissoni


Luminaire for outdoor use for built-in installation on the wall with LED light source. Integrated 220/240V power source. Supplied with a double cable gland in plastic material for 7.5< ϕ <9.5 mm section cables.

	F4357001	White
	F4357006	Grey
	F4357033	Anthracite
	F4357030	Black
	F4357018	Deep Brown

DIMENSIONS



CERTIFICATIONS

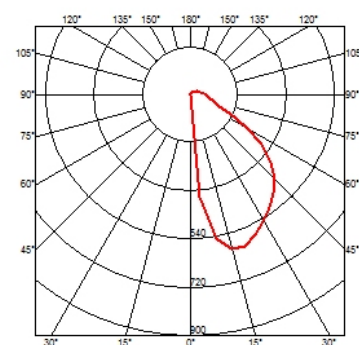

MY WAY 110X200

Insulation class	Class I
Beam angle	88°
Mounting	Wall surface
Lamps description	Mid-Power Led: 13W - 1577 lm ≠ FIXT 763 lm - 3000K/CRI 80 - 220-240V
Environment	Indoor, Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

Technical description	Aluminum die-cast body EN AB-47100 (low copper content). High-resistance coating: after a sandblasting treatment of all components to make the surface porous and ensure a greater adhesion of the paint, the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Frosted polycarbonate diffuser, UV-stabilised, glued to the head of the product to ensure a watertight seal.
------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

ELECTRICAL

Transformer type	Electronic
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240

PHYSICAL

Aiming	Fixed
Weight (kg)	0,95
Number of heads	1




My Way 110x200

designed by Piero Lissoni


Luminaire for outdoor use for built-in installation on the wall with LED light source. Integrated 220/240V power source. Supplied with a 120 mm section of outgoing neoprene cable and IP67 cable connection system.

● F4354001	White
● F4354006	Grey
● F4354033	Anthracite
● F4354030	Black
● F4354018	Deep Brown

DIMENSIONS



CERTIFICATIONS

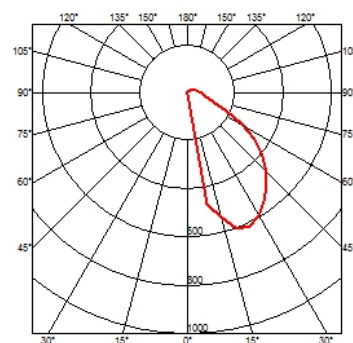




MyWay 110x200

designed by Piero Lissoni


Luminaire for outdoor use for built-in installation on the wall with LED light source. Integrated 220/240V power source. Supplied with a 120 mm section of outgoing neoprene cable and IP67 cable connection system.

- F4354001 White
- F4354006 Grey
- F4354033 Anthracite
- F4354030 Black
- F4354018 Deep Brown

DIMENSIONS



CERTIFICATIONS

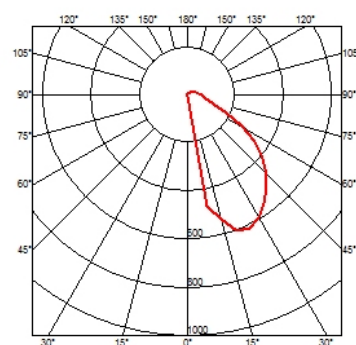

MyWay 110x200 .Accessories

Electrical



○ F990C00A000


2 way terminal block 3 poles IP68

7-12 mm cables

FLOS

My Way 110x200 .Accessories

Mounting



F4302000

Remote Housing




My Way 110x200

designed by Piero Lissoni

Luminaire for outdoor use for built-in installation on the wall with LED light source. Integrated 220/240V power source. Supplied with a 120 mm section of outgoing neoprene cable and IP67 cable connection system.

- F4354001 White
- F4354006 Grey
- F4354033 Anthracite
- F4354030 Black
- F4354018 Deep Brown

DIMENSIONS



My Way 110x200 .Lamps



Mid-Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED

CERTIFICATIONS

