

FLOS

KAP SURFACE WALL Ø100

Number of heads	1
Mounting	Wall surface
Lamps description	Power LED 9W 850 lm 3000K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	110/240
Environment	Indoor



OPTICAL

Reflector finish	White
Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	33°

Kap Surface Wall Ø100 designed by FLOS Architectural

Luminaire for wall mounting with led light source. nonregulable 110/240V, 50-60hz power supply integrated in luminaire body.



ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I


	03.5730.11A - 378lm	White / White
	03.5730.ASA - 378lm	Brushed Aluminium / White
	03.5730.ANA - 378lm	Black / White
	03.5730.B3A - 378lm	Brown / White

PHYSICAL

Diameter (mm)	100
Height (mm)	236
Construction material	Extruded aluminum
Weight (kg)	0,90

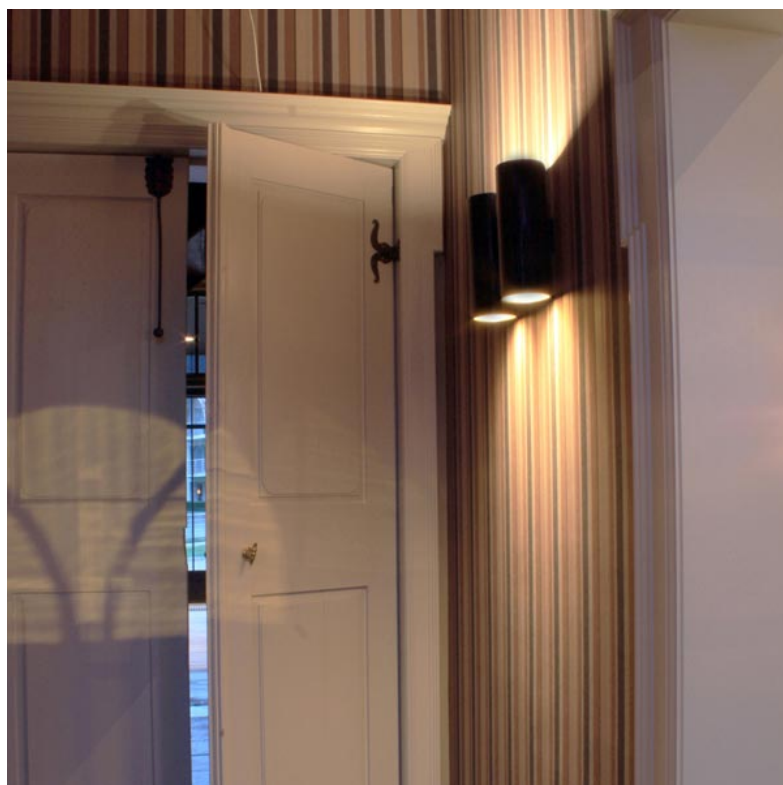

CERTIFICATIONS

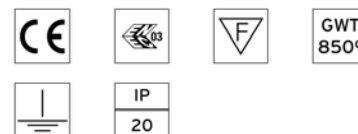

FLOS

Kap Surface Wall Ø100 . Lamps



Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED



Kap Surface Wall Ø100 designed by FLOS Architectural

Luminaire for wall mounting with led light source. nonregulable 110/240V, 50-60hz power supply integrated in luminaire body.

- 03.5730.11A - 378lm White / White
- 03.5730.ASA - 378lm Brushed Aluminium / White
- 03.5730.ANA - 378lm Black / White
- 03.5730.B3A - 378lm Brown / White



CERTIFICATIONS

