

# FLOS

## LIGHT SHADOW FIXED NO TRIM DALI VERSION 12 SPOTS OPTIC FLOOD

<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Power LED 32,4W 3360 lm 3000K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	It requires an pre-installation frame, to be ordered separately.

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	33° Flood

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable DALI
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL

<b>Length (mm)</b>	420
<b>Recessed depth (mm)</b>	75
<b>Weight (kg)</b>	0,66




**Light Shadow Fixed No Trim Dali Version 12 Spots Optic Flood**



designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- 03.9275.40.DA - 2523lm White / White
- 03.9275.14.DA - 2523lm Black / White
- 03.9277.40.DA - 2580lm White / Chrome
- 03.9277.14.DA - 2580lm Black / Chrome
- 03.9278.40.DA - 2500lm White / Matt Gold
- 03.9278.14.DA - 2500lm Black / Matt Gold
- 03.9276.40.DA - 2451lm White / Black
- 03.9276.14.DA - 2451lm Black / Black

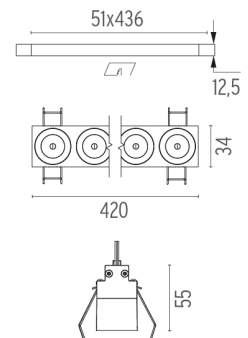

### CERTIFICATIONS

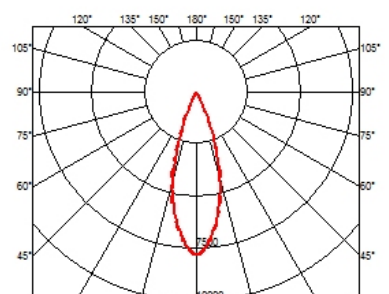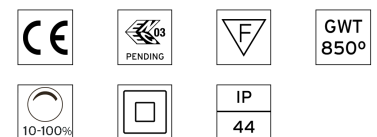

# FLOS

## Light Shadow Fixed No Trim Dali Version 12 Spots Optic Flood . Accessories

### Mounting




○ 08.0513.00

**Pre-installation frame.  
Fixed No Trim 12L**

○ 08.0052.90

**Accessory for mounting of  
No Trim continuous line**

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim pre-installation frames.

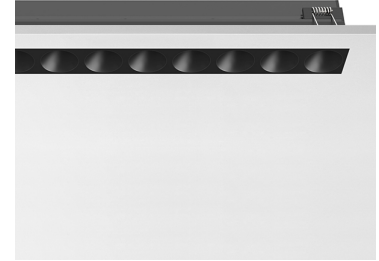

**Light Shadow Fixed No Trim Dali  
Version 12 Spots Optic Flood**

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- 03.9275.40.DA - 2523lm White / White
- 03.9275.14.DA - 2523lm Black / White
- 03.9277.40.DA - 2580lm White / Chrome
- 03.9277.14.DA - 2580lm Black / Chrome
- 03.9278.40.DA - 2500lm White / Matt Gold
- 03.9278.14.DA - 2500lm Black / Matt Gold
- 03.9276.40.DA - 245lm White / Black
- 03.9276.14.DA - 245lm Black / Black

## Light Shadow Fixed No Trim Dali Version 12 Spots Optic Flood . Lamps




**Power LED**



**Lamp category:**  
LED

**Socket:**  
Special base

**Lamp type:**  
Power LED

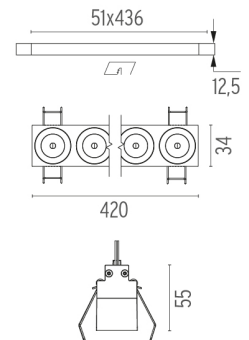

### CERTIFICATIONS

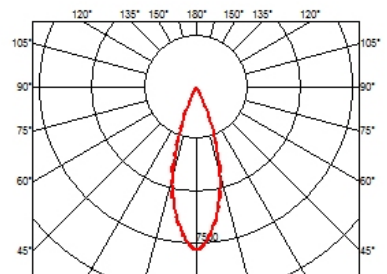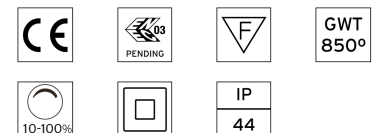

# FLOS

## LIGHT SHADOW ADJUSTABLE NO TRIM DALI VERSION 12 SPOTS OPTIC FLOOD

<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Power LED 32,4W 3360 lm 3000K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	It requires an pre-installation frame, to be ordered separately.

### OPTICAL

<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	33° Flood

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable DALI
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL

<b>Recessed depth (mm)</b>	75
<b>Weight (kg)</b>	0,66





**Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Flood**



designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

-  03.9475.40.DA - 2523lm White / White
-  03.9475.14.DA - 2523lm Black / White
-  03.9477.40.DA - 2580lm White / Chrome
-  03.9477.14.DA - 2580lm Black / Chrome
-  03.9478.40.DA - 2500lm White / Matt Gold
-  03.9478.14.DA - 2500lm Black / Matt Gold
-  03.9476.40.DA - 2451lm White / Black
-  03.9476.14.DA - 2451lm Black / Black

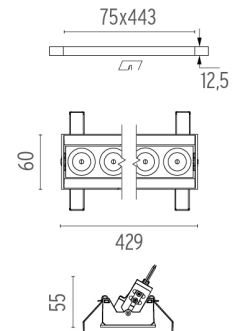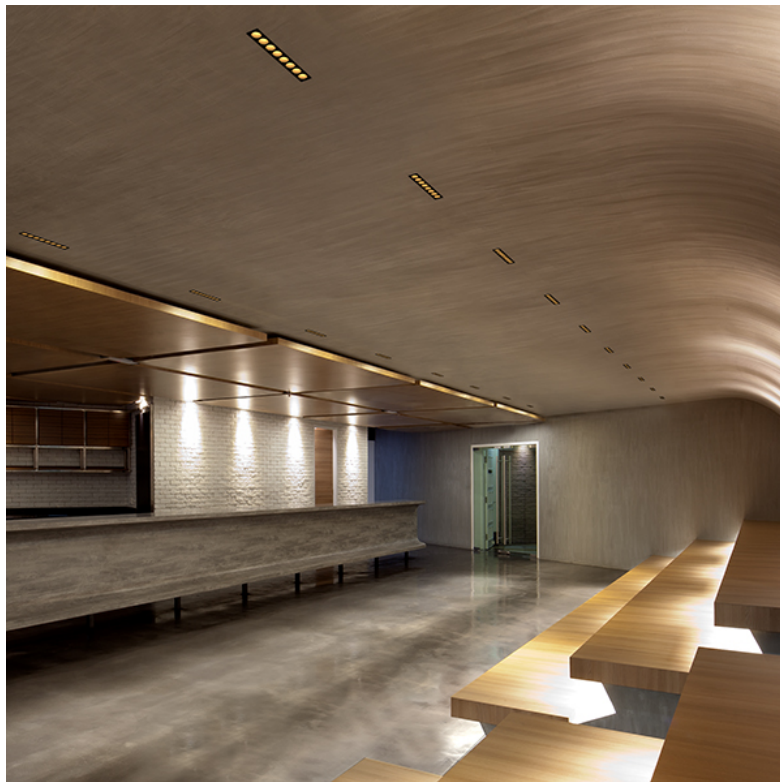

### CERTIFICATIONS

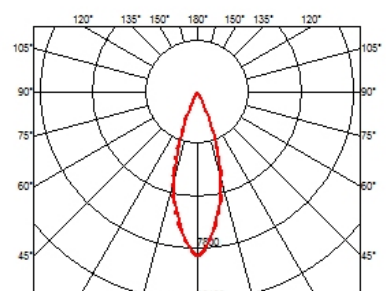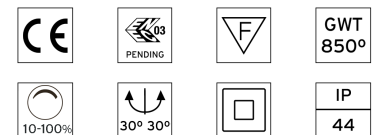

# FLOS

## Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Flood . Accessories

### Mounting



○ 08.0518.00

**Pre-installation frame. Adjustable No Trim 12L**

○ 08.0059.90

**Accessory for mounting of No Trim continuous line**

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim pre-installation frames.



**Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Flood**

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- 03.9475.40.DA - 2523lm White / White
- 03.9475.14.DA - 2523lm Black / White
- 03.9477.40.DA - 2580lm White / Chrome
- 03.9477.14.DA - 2580lm Black / Chrome
- 03.9478.40.DA - 2500lm White / Matt Gold
- 03.9478.14.DA - 2500lm Black / Matt Gold
- 03.9476.40.DA - 245lm White / Black
- 03.9476.14.DA - 245lm Black / Black

## Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Flood . Lamps



**Power LED**

**Lamp category:**


LED

**Socket:**

Special base

**Lamp type:**

Power LED

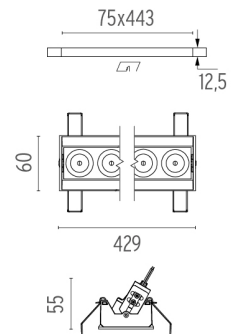

### CERTIFICATIONS

