

LIGHT SHADOW FIXED TRIM DALI VERSION 2 SPOTS OPTIC FLOOD

| | |
|--------------------------------|---------------------------------------|
| Mounting | Ceiling recessed |
| Lamps description | Power LED 5,4W 520 lm 2700K CRI 90 |
| Luminaire luminous flux | Extreme Cut-off. See reference number |
| Environment | Indoor |
| Notes | Pre-installation frame not required. |

OPTICAL

| | |
|------------------------------------|-----------|
| Aiming | Fixed |
| Light distribution symmetry | Symmetric |
| Beam angle | 33° Flood |

ELECTRICAL

| | |
|---------------------------------|--------------------------|
| Transformer availability | Included |
| Transformer mounting | Remote |
| Transformer type | Electronic dimmable DALI |
| Emergency | Without |
| Insulation class | Class II |

PHYSICAL



| | |
|----------------------------|------|
| Length (mm) | 77 |
| Recessed depth (mm) | 75 |
| Weight (kg) | 0,25 |





**Light Shadow Fixed Trim Dali
Version 2 Spots Optic Flood**
designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

| | | |
|--|-----------------------|-------------------|
| | 03.9105.40.DA - 394lm | White / White |
| | 03.9105.14.DA - 394lm | Black / White |
| | 03.9107.40.DA - 403lm | White / Chrome |
| | 03.9107.14.DA - 403lm | Black / Chrome |
| | 03.9108.40.DA - 390lm | White / Matt Gold |
| | 03.9108.14.DA - 390lm | Black / Matt Gold |
| | 03.9106.40.DA - 383lm | White / Black |
| | 03.9106.14.DA - 383lm | Black / Black |

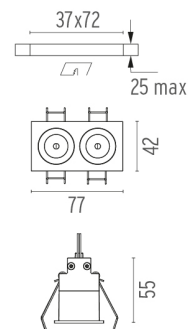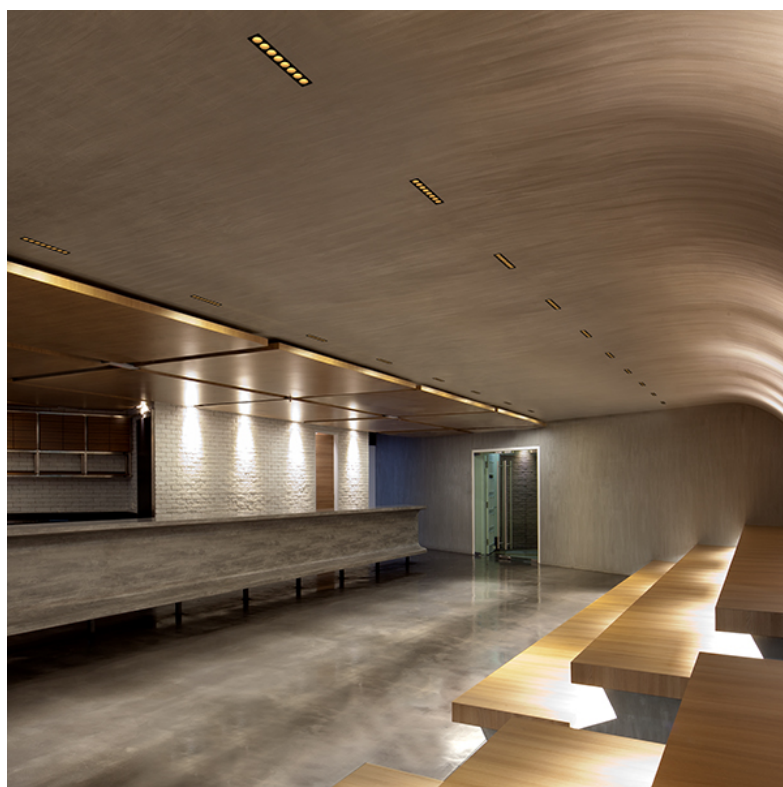

CERTIFICATIONS

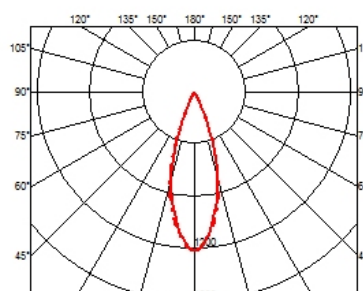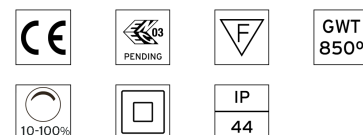

FLOS

Light Shadow Fixed Trim Dali Version 2 Spots Optic Flood . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Shadow Fixed Trim Dali Version 2 Spots Optic Flood



designed by FLOS Architectural

Recessed integrated luminaire with 2
LED lighting spots. Remote power
supply included.

| | | |
|--|-----------------------|-------------------|
| | 03.9105.40.DA - 394lm | White / White |
| | 03.9105.14.DA - 394lm | Black / White |
| | 03.9107.40.DA - 403lm | White / Chrome |
| | 03.9107.14.DA - 403lm | Black / Chrome |
| | 03.9108.40.DA - 390lm | White / Matt Gold |
| | 03.9108.14.DA - 390lm | Black / Matt Gold |
| | 03.9106.40.DA - 383lm | White / Black |
| | 03.9106.14.DA - 383lm | Black / Black |

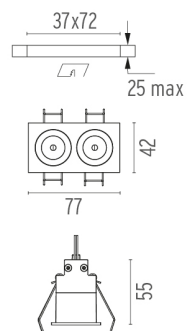

CERTIFICATIONS

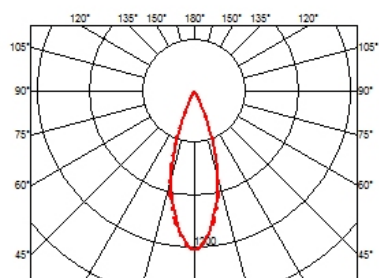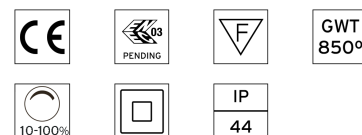

LIGHT SHADOW ADJUSTABLE TRIM DALI VERSION 2 SPOTS OPTIC FLOOD

| | |
|--------------------------------|---------------------------------------|
| Mounting | Ceiling recessed |
| Lamps description | Power LED 5,4W 560 lm 3000K CRI 90 |
| Luminaire luminous flux | Extreme Cut-off. See reference number |
| Environment | Indoor |
| Notes | Pre-installation frame not required. |

OPTICAL


| | |
|------------------------------------|------------|
| Aiming | Adjustable |
| Light distribution symmetry | Symmetric |
| Beam angle | 33° Flood |

ELECTRICAL

| | |
|---------------------------------|--------------------------|
| Transformer availability | Included |
| Transformer mounting | Remote |
| Transformer type | Electronic dimmable DALI |
| Emergency | Without |
| Insulation class | Class II |

PHYSICAL


| | |
|----------------------------|------|
| Recessed depth (mm) | 75 |
| Weight (kg) | 0,25 |

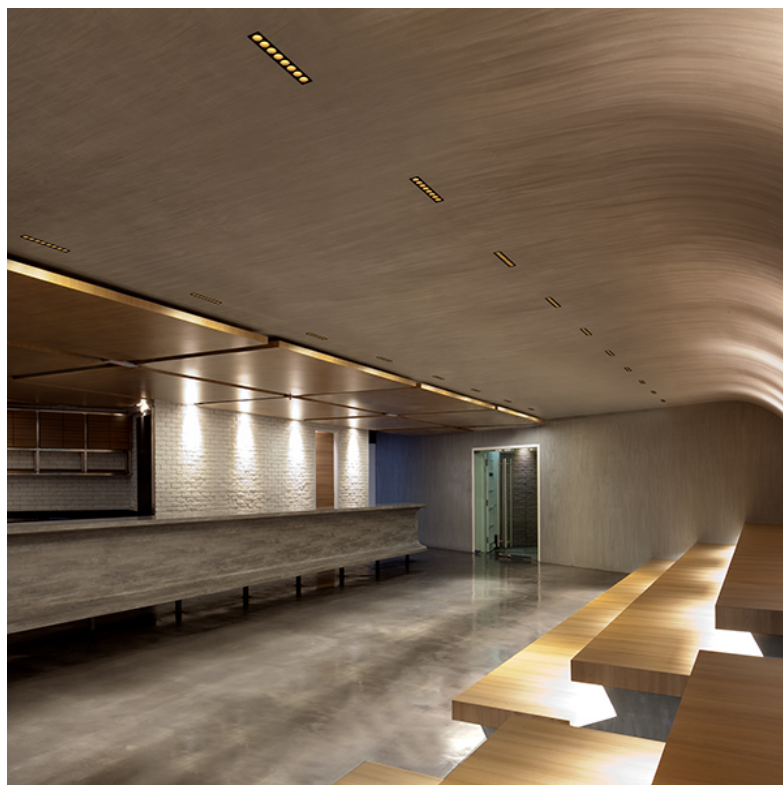

Light Shadow Adjustable Trim Dali Version 2 Spots Optic Flood
designed by FLOS Architectural


Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

| | |
|-----------------------|-------------------|
| 03.9315.40.DA - 420lm | White / White |
| 03.9315.14.DA - 420lm | Black / White |
| 03.9317.40.DA - 430lm | White / Chrome |
| 03.9317.14.DA - 430lm | Black / Chrome |
| 03.9318.40.DA - 417lm | White / Matt Gold |
| 03.9318.14.DA - 417lm | Black / Matt Gold |
| 03.9316.40.DA - 408lm | White / Black |
| 03.9316.14.DA - 408lm | Black / Black |

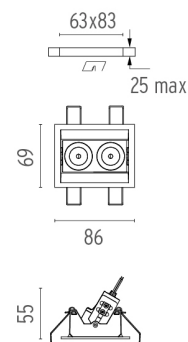

CERTIFICATIONS

| | | | |
|---------|---------|-------|----------|
| CE | RoHS | F | GWT 850° |
| 10-100% | 30° 30° | IP 44 | |

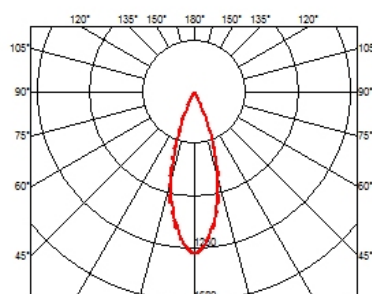

FLOS

Light Shadow Adjustable Trim Dali Version 2 Spots Optic Flood . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Shadow Adjustable Trim Dali Version 2 Spots Optic Flood

designed by FLOS Architectural

Recessed integrated luminaire with 2
LED lighting spots. Remote power
supply included.

| | | |
|--|-----------------------|-------------------|
| | 03.9315.40.DA - 420lm | White / White |
| | 03.9315.14.DA - 420lm | Black / White |
| | 03.9317.40.DA - 430lm | White / Chrome |
| | 03.9317.14.DA - 430lm | Black / Chrome |
| | 03.9318.40.DA - 417lm | White / Matt Gold |
| | 03.9318.14.DA - 417lm | Black / Matt Gold |
| | 03.9316.40.DA - 408lm | White / Black |
| | 03.9316.14.DA - 408lm | Black / Black |

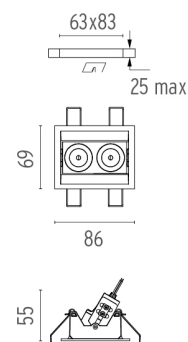

CERTIFICATIONS

