

## LIGHT SHADOW FIXED NO TRIM DALI VERSION 2 SPOTS OPTIC FLOOD

<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Power LED 5,4W 560 lm 3000K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	It requires an pre-installation frame, to be ordered separately.

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	33° Flood

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable DALI
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL


<b>Length (mm)</b>	70
<b>Recessed depth (mm)</b>	75
<b>Weight (kg)</b>	0,25





**Light Shadow Fixed No Trim  
Dali Version 2 Spots Optic Flood**  
designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

	03.9215.40.DA - 420lm	White / White
	03.9215.14.DA - 420lm	Black / White
	03.9217.40.DA - 430lm	White / Chrome
	03.9217.14.DA - 430lm	Black / Chrome
	03.9218.40.DA - 417lm	White / Matt Gold
	03.9218.14.DA - 417lm	Black / Matt Gold
	03.9216.40.DA - 408lm	White / Black
	03.9216.14.DA - 408lm	Black / Black

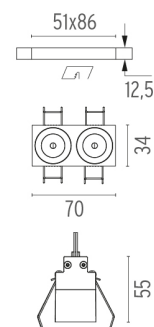

### CERTIFICATIONS

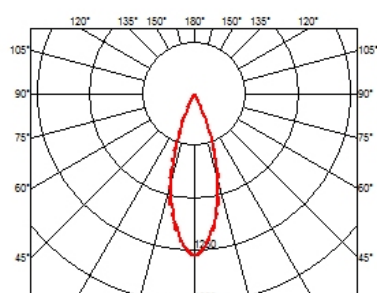

## Light Shadow Fixed No Trim Dali Version 2 Spots Optic Flood . Accessories

### Mounting



08.0510.00

**Pre-installation frame.  
Fixed No Trim 2L**



08.0052.90

**Accessory for mounting of  
No Trim continuous line**

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim pre-installation frames.



**Light Shadow Fixed No Trim  
Dali Version 2 Spots Optic Flood**

designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

- 03.9215.40.DA - 420lm White / White
- 03.9215.14.DA - 420lm Black / White
- 03.9217.40.DA - 430lm White / Chrome
- 03.9217.14.DA - 430lm Black / Chrome
- 03.9218.40.DA - 417lm White / Matt Gold
- 03.9218.14.DA - 417lm Black / Matt Gold
- 03.9216.40.DA - 408lm White / Black
- 03.9216.14.DA - 408lm Black / Black

## Light Shadow Fixed No Trim Dali Version 2 Spots Optic Flood . Lamps




**Power LED**


**Lamp category:**  
LED

**Socket:**  
Special base

**Lamp type:**  
Power LED

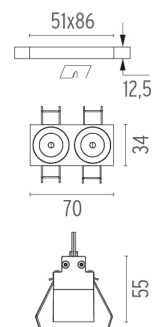

### CERTIFICATIONS

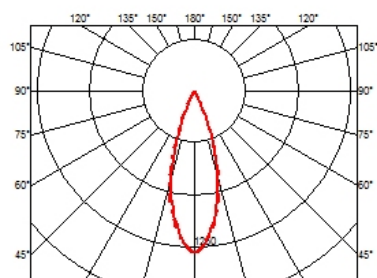

## LIGHT SHADOW ADJUSTABLE NO TRIM DALI VERSION 2 SPOTS OPTIC FLOOD

<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Power LED 5,4W 560 lm 3000K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	It requires an pre-installation frame, to be ordered separately.

### OPTICAL


<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	33° Flood

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable DALI
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL

<b>Recessed depth (mm)</b>	75
<b>Weight (kg)</b>	0,25

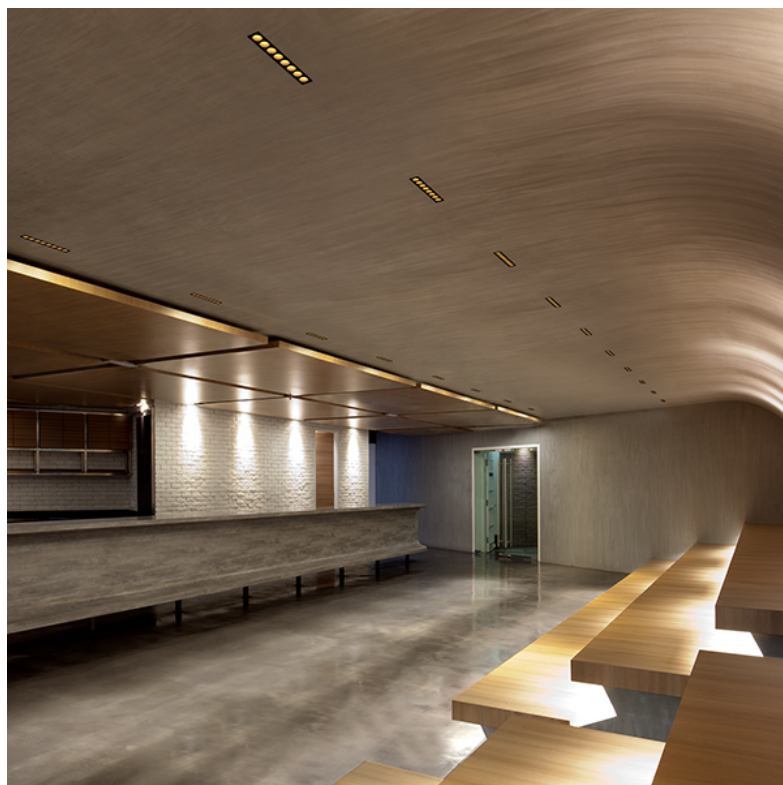


**Light Shadow Adjustable No Trim  
Dali Version 2 Spots Optic Flood**



designed by FLOS Architectural

Recessed integrated luminaire with 2  
LED lighting spots. Remote power  
supply included.

	03.9415.40.DA - 420lm	White / White
	03.9415.14.DA - 420lm	Black / White
	03.9417.40.DA - 430lm	White / Chrome
	03.9417.14.DA - 430lm	Black / Chrome
	03.9418.40.DA - 417lm	White / Matt Gold
	03.9418.14.DA - 417lm	Black / Matt Gold
	03.9416.40.DA - 408lm	White / Black
	03.9416.14.DA - 408lm	Black / Black

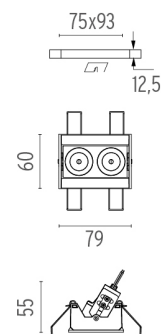

### CERTIFICATIONS

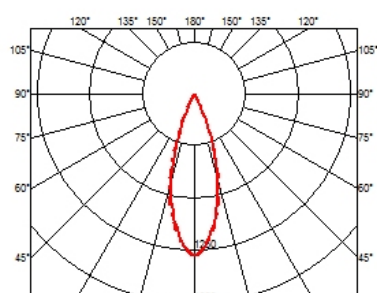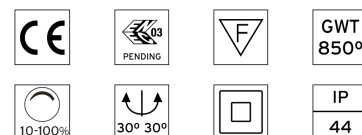

## Light Shadow Adjustable No Trim Dali Version 2 Spots Optic Flood . Accessories

### Mounting



08.0515.00

**Pre-installation frame.  
Adjustable No Trim 2L**



08.0059.90

**Accessory for mounting of  
No Trim continuous line**

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim pre-installation frames.



**Light Shadow Adjustable No Trim  
Dali Version 2 Spots Optic Flood**

designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

- 03.9415.40.DA - 420lm White / White
- 03.9415.14.DA - 420lm Black / White
- 03.9417.40.DA - 430lm White / Chrome
- 03.9417.14.DA - 430lm Black / Chrome
- 03.9418.40.DA - 417lm White / Matt Gold
- 03.9418.14.DA - 417lm Black / Matt Gold
- 03.9416.40.DA - 408lm White / Black
- 03.9416.14.DA - 408lm Black / Black

## Light Shadow Adjustable No Trim Dali Version 2 Spots Optic Flood . Lamps




**Power LED**

**Lamp category:**  
LED

**Socket:**  
Special base

**Lamp type:**  
Power LED

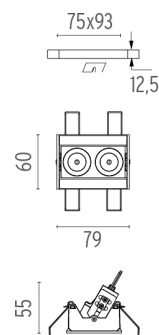

### CERTIFICATIONS

