

LIGHT SHADOW FIXED NO TRIM DALI VERSION 8 SPOTS OPTIC FLOOD

Mounting	Ceiling recessed
Lamps description	Power LED 21,6W 2240 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	It requires an pre-installation frame, to be ordered separately.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	33° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable DALI
Emergency	Without
Insulation class	Class II

PHYSICAL


Length (mm)	280
Recessed depth (mm)	75
Weight (kg)	0,50





**Light Shadow Fixed No Trim
Dali Version 8 Spots Optic Flood**
designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

- 03.9255.40.DA - 1682lm White / White
- 03.9255.14.DA - 1682lm Black / White
- 03.9257.40.DA - 1720lm White / Chrome
- 03.9257.14.DA - 1720lm Black / Chrome
- 03.9258.40.DA - 1667lm White / Matt Gold
- 03.9258.14.DA - 1667lm Black / Matt Gold
- 03.9256.40.DA - 1634lm White / Black
- 03.9256.14.DA - 1634lm Black / Black

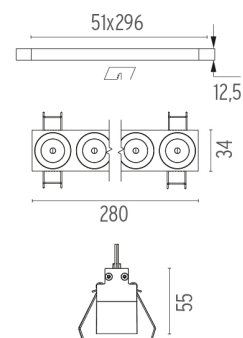

CERTIFICATIONS

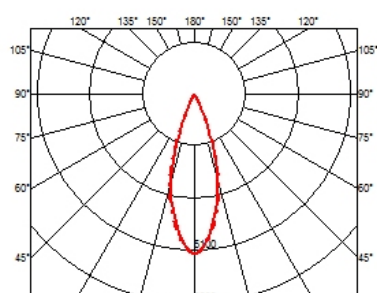

FLOS

Light Shadow Fixed No Trim Dali Version 8 Spots Optic Flood . Accessories

Mounting



08.0512.00

**Pre-installation frame.
Fixed No Trim 8L**



08.0052.90

**Accessory for mounting of
No Trim continuous line**

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim pre-installation frames.



**Light Shadow Fixed No Trim
Dali Version 8 Spots Optic Flood**

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

- 03.9255.40.DA - 1682lm White / White
- 03.9255.14.DA - 1682lm Black / White
- 03.9257.40.DA - 1720lm White / Chrome
- 03.9257.14.DA - 1720lm Black / Chrome
- 03.9258.40.DA - 1667lm White / Matt Gold
- 03.9258.14.DA - 1667lm Black / Matt Gold
- 03.9256.40.DA - 1634lm White / Black
- 03.9256.14.DA - 1634lm Black / Black

Light Shadow Fixed No Trim Dali Version 8 Spots Optic Flood . Lamps




Power LED


Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED

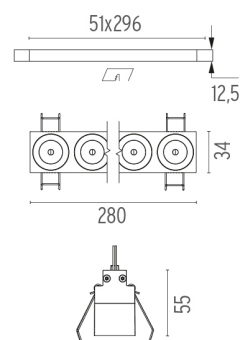

CERTIFICATIONS

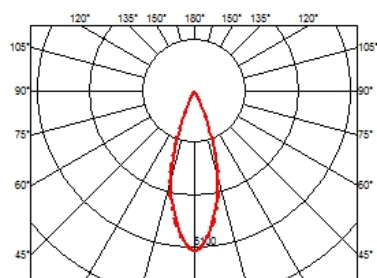

LIGHT SHADOW ADJUSTABLE NO TRIM DALI VERSION 8 SPOTS OPTIC FLOOD

Mounting	Ceiling recessed
Lamps description	Power LED 21,6W 2240 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	It requires an pre-installation frame, to be ordered separately.

OPTICAL


Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	33° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable DALI
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,50

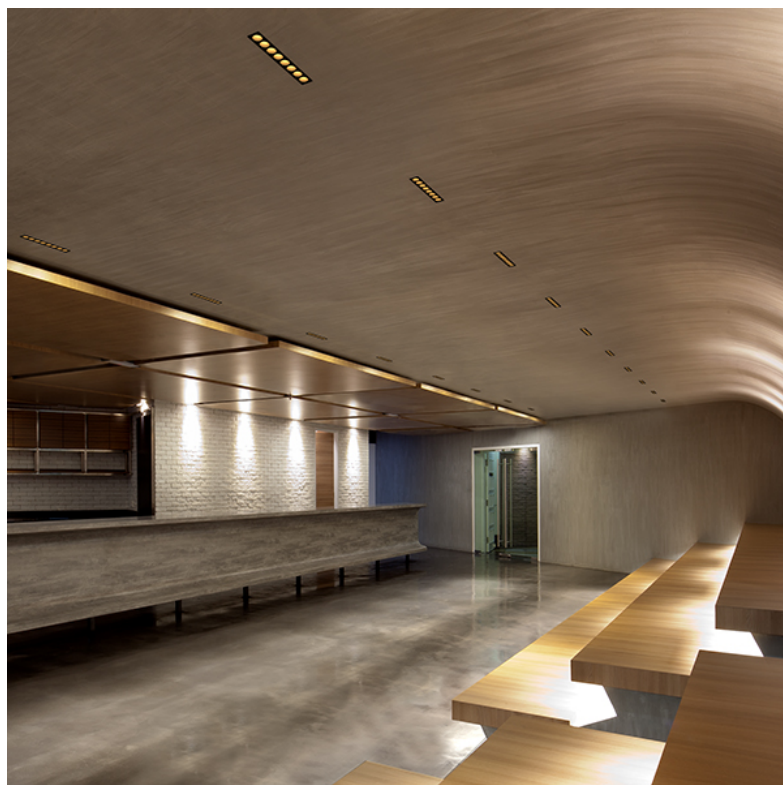


**Light Shadow Adjustable No Trim
DALI Version 8 Spots Optic Flood**



designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

- 03.9455.40.DA - 1682lm White / White
- 03.9455.14.DA - 1682lm Black / White
- 03.9457.40.DA - 1720lm White / Chrome
- 03.9457.14.DA - 1720lm Black / Chrome
- 03.9458.40.DA - 1667lm White / Matt Gold
- 03.9458.14.DA - 1667lm Black / Matt Gold
- 03.9456.40.DA - 1634lm White / Black
- 03.9456.14.DA - 1634lm Black / Black

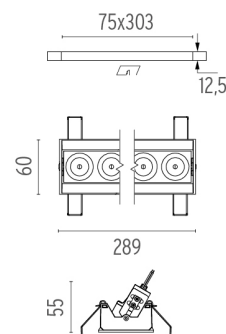

CERTIFICATIONS

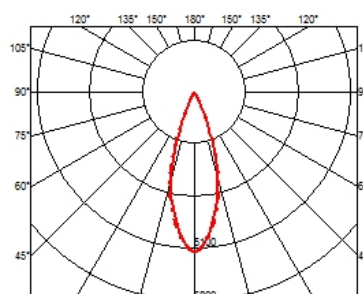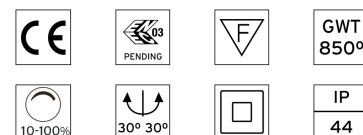

FLOS

Light Shadow Adjustable No Trim Dali Version 8 Spots Optic Flood . Accessories

Mounting



08.0517.00

**Pre-installation frame.
Adjustable No Trim 8L**



08.0059.90

**Accessory for mounting of
No Trim continuous line**

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim pre-installation frames.



**Light Shadow Adjustable No Trim
Dali Version 8 Spots Optic Flood**

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

- 03.9455.40.DA - 1682lm White / White
- 03.9455.14.DA - 1682lm Black / White
- 03.9457.40.DA - 1720lm White / Chrome
- 03.9457.14.DA - 1720lm Black / Chrome
- 03.9458.40.DA - 1667lm White / Matt Gold
- 03.9458.14.DA - 1667lm Black / Matt Gold
- 03.9456.40.DA - 1634lm White / Black
- 03.9456.14.DA - 1634lm Black / Black

Light Shadow Adjustable No Trim Dali Version 8 Spots Optic Flood . Lamps




Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED

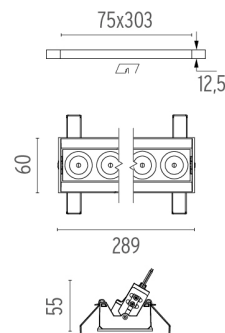

CERTIFICATIONS

