

IN THE WIND PENDANT HORIZONTAL

Arihiro Miyake

Pendelleuchte mit warmer und diffuser LED-Beleuchtung. Die Struktur wird mit einem von NEMO entwickelten Twist Off-Axis-Verfahren des fließgepressten Aluminiums realisiert (zum Patent angemeldet). Dies erlaubt eine 360° LED-Beleuchtung. Die Kopfteile sind aus Aluminiumdruckguß. Die Diffusoren sind aus opalweißem Methacrylat. Die Struktur ist matt weiß, matt schwarz, titangrau oder goldfarben lackiert.



NEMO

www.nemolighting.com

IN THE WIND PENDANT HORIZONTAL - 1 / 3

LED 2700K

LAMPING

Source	linear LED
Total power	58W
Emission	diffused, 360°
Switching	dimmable, DALI push
Tension	230V
Color temperature	2700K
Luminous flux	2850lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC
Notes	metal cable length 3m, electric cable length 5m, also available in 120V
Net lamp weight	4 kg

Codes

ITW LWW 56
ITW LNW 56
ITW LGW 56
ITW LDW 56

Structure/Diffuser


white/white
black/white
gold/white
titan grey/white

PACKAGE

Package 01

Dimension: 28x28x195 cm / Gross weight: 7 kg

Certificazioni

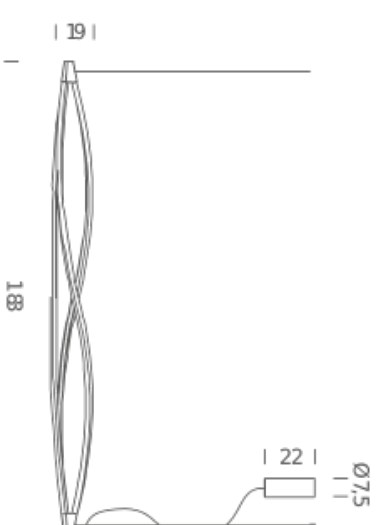

LED 3000K

LAMPING

Source	linear LED
Total power	58W
Emission	diffused, 360°
Switching	dimmable, DALI push
Tension	230V
Color temperature	3000K
Luminous flux	2850lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC
Notes	metal cable length 3m, electric cable length 5m, also available in 120V
Net lamp weight	4 kg

Codes

ITW LWW 57
ITW LNW 57
ITW LGW 57
ITW LDW 57

Structure/Diffuser


white/white
black/white
gold/white
titan grey/white

PACKAGE

Package 01

Dimension: 28x28x195 cm / Gross weight: 7 kg

Certificazioni

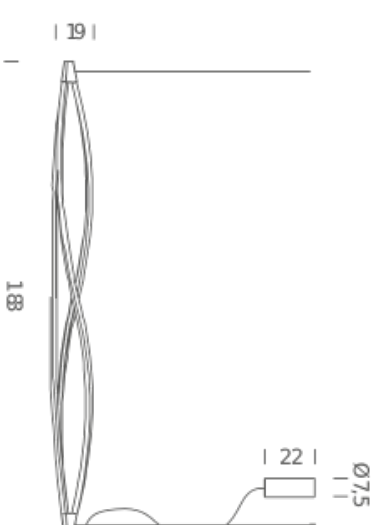

IN THE WIND PENDANT VERTICAL

Arihiro Miyake

Pendelleuchte mit warmer und diffuser LED-Beleuchtung. Die Struktur wird mit einem von NEMO entwickelten Twist Off-Axis-Verfahren des fließgepressten Aluminiums realisiert (zum Patent angemeldet). Dies erlaubt eine 360° LED-Beleuchtung. Die Kopfteile sind aus Aluminiumdruckguß. Die Diffusoren sind aus opalweißem Methacrylat. Die Struktur ist matt weiß, matt schwarz, titangrau oder goldfarben lackiert.



NEMO

www.nemolighting.com

IN THE WIND PENDANT VERTICAL - 1 / 3

LED 2700K

LAMPING

Source	linear LED
Total power	58W
Emission	diffused, 360°
Switching	dimmable, DALI push
Tension	230V
Color temperature	2700K
Luminous flux	2850lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC
Notes	cable length 3m, also available in 120V
Net lamp weight	4 kg

Codes

ITW LMW 55
ITW LNW 55
ITW LGW 55
ITW LDW 55

Structure/Diffuser
white/white
black/white
gold/white
titan grey/white

PACKAGE

Package 01

Dimension: 28x28x195 cm / Gross weight: 7 kg

Certificazioni



LED 3000K

LAMPING

Source	linear LED
Total power	58W
Emission	diffused, 360°
Switching	dimmable, DALI push
Tension	230V
Color temperature	3000K
Luminous flux	2850lm
Typ cri	85
Energy class	A+
Materials	aluminium + PC
Notes	cable length 3m, also available in 120V
Net lamp weight	4 kg

Codes

ITW LWW 58
ITW LNW 58
ITW LGW 58
ITW LDW 58

Structure/Diffuser
white/white
black/white
gold/white
titan grey/white

PACKAGE

Package 01

Dimension: 28x28x195 cm / Gross weight: 7 kg

Certificazioni

