







String Light – Sphere head – 12mt cable

by Michael Anastassiades , 2014




Suspension lamp providing diffused light. Matt black varnished die-cast aluminium body coated with clear soft-touch varnish. Optical diffuser in opal PC. Suspension system of 12 metres with Kevlar reinforced coaxial cable. Available with wall/ceiling connection in black PC and power supply with floor switch in matt black varnished PC. The on/off switch is electronic with optical mechanism. on/off and dimmer operated by means of available for Android and Apple remote control application.



Mounting	Pendant
Environment	Indoor
Weight	1.15 Kg
Light sources available	1 x LED ARRAY 21W 2700K 1345lm CRI93 [i] Dimmable – Bluetooth Control
Emergency Switching	Without
Dimmer	Included
Voltage	100-240/48V
Power	21W
Battery	No
Supply included	No
Cord Length	12000 mm
Materials	Aluminum, Polycarbonate
Colors	● F6480030 - Black
Certificate	   

String Light – Sphere head – 12mt cable

by Michael Anastassiades , 2014

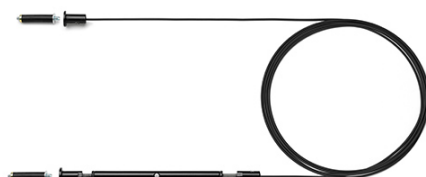

F6482030

Wallrose. Feed up 2 heads maximum; 3 wayout for cables.

Wall or ceiling installation.

F6485030

Extra connection cable to compose personal configurations.

F6484030

Floor Switch. Feed up two heads maximum; 2 wayout for cables.

Space to wrap 10 meters cable.





String Light – Sphere head – 22m cable



by Michael Anastassiades , 2014



Suspension lamp providing diffused light. Matt black varnished die-cast aluminium body coated with clear soft-touch varnish. Optical diffuser in opal PC. Suspension system of 22 metres with Kevlar reinforced coaxial cable. Available with wall/ceiling connection in black PC and power supply with floor switch in matt black varnished PC. The on/off switch is electronic with optical mechanism. on/off and dimmer operated by means of available for Android and Apple remote control application.




Mounting	Pendant
Environment	Indoor
Weight	1.25 Kg
Light sources available	1 x LED ARRAY 21W 2700K 1345lm CRI93 [i] Dimmable – Bluetooth Control
Emergency Switching	Without The on/off switch is electronic with optical mechanism. on/off and dimmer operated by means of remote control application available for Android and Apple.
Voltage	100-240/48V
Power	21W
Battery	No
Supply included	No
Cord Length	22000 mm
Materials	Aluminum, Polycarbonate
Colors	● F6490030 - Black
Certificate	   



String Light – Sphere head – 22mt cable

by Michael Anastassiades , 2014

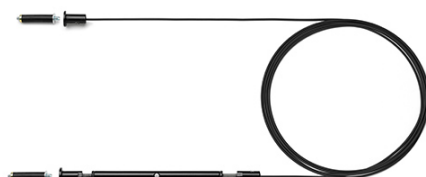

F6482030

Wallrose. Feed up 2 heads maximum; 3 wayout for cables.

Wall or ceiling installation.

F6485030

Extra connection cable to compose personal configurations.

F6484030

Floor Switch. Feed up two heads maximum; 2 wayout for cables.

Space to wrap 10 meters cable.