

OUTGRAZE 48 L 900 MM

Insulation class	Class I
Beam angle	14°
Mounting	Ceiling surface, Wall surface
Lamps description	Power Led: 24W - 2340 lm ≠ *FIXT 1797 lm - 3000K/CRI 80 - 220-240V (*FIXT lm = Medium Optic)
Environment	Indoor, Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 48 L 900 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

● F4222001	White
● F4222006	Grey
● F4222033	Anthracite
● F4222030	Black
● F4222018	Deep Brown


ELECTRICAL

Transformer type	Electronic
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240



PHYSICAL

IK rating	06
Aiming	Fixed
Weight (kg)	3,30
Number of heads	1

DIMENSIONS



CERTIFICATIONS

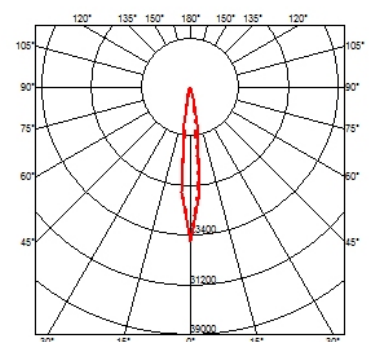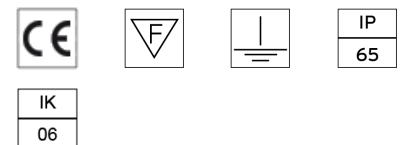



Outgraze 48 L 900 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4222001 White
- F4222006 Grey
- F4222033 Anthracite
- F4222030 Black
- F4222018 Deep Brown

Outgraze 48 L 900 mm .Accessories

Structural




- F1204001
- F1204006
- F1204033
- F1204030
- F1204018

One pair of long rods L
200 mm.



- F1203001
- F1203006
- F1203033
- F1203030
- F1203018

One pair of short rods L
80 mm.

DIMENSIONS

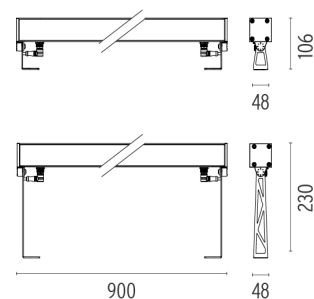

CERTIFICATIONS

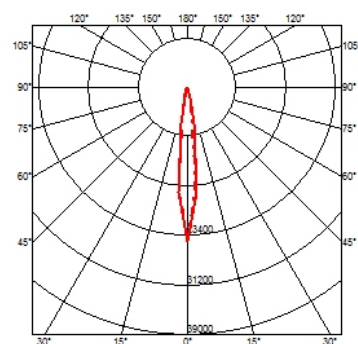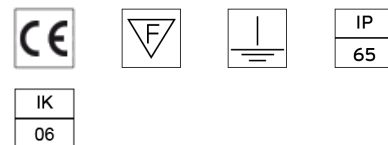

FLOS

Outgraze 48 L 900 mm .Accessories

Electrical



○ F1206000

3/4 way terminal block 3 poles IP68

7-12 mm cables



○ F990C00A000

2 way terminal block 3 poles IP68

7-12 mm cables

Outgraze 48 L 900 mm . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Outgraze 48 L 900 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4222001 White
- F4222006 Grey
- F4222033 Anthracite
- F4222030 Black
- F4222018 Deep Brown

DIMENSIONS



CERTIFICATIONS

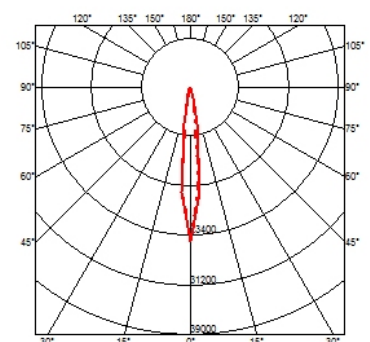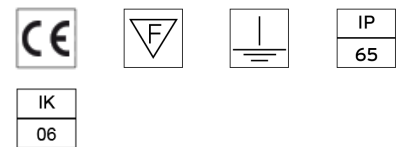

OUTGRAZE 48 L 900 MM

Insulation class	Class I
Beam angle	13°
Mounting	Ceiling surface, Wall surface
Lamps description	Power Led: 24W - 2340 lm ≠ *FIXT 1797 lm - 3000K/CRI 80 - 220-240V (*FIXT lm = Medium Optic)
Environment	Indoor, Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 48 L 900 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

● F4240001	White
● F4240006	Grey
● F4240033	Anthracite
● F4240030	Black
● F4240018	Deep Brown


ELECTRICAL

Transformer type	Electronic
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240



PHYSICAL

IK rating	06
Aiming	Fixed
Weight (kg)	3,30
Number of heads	1

DIMENSIONS



CERTIFICATIONS

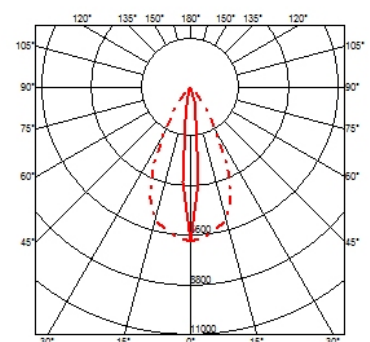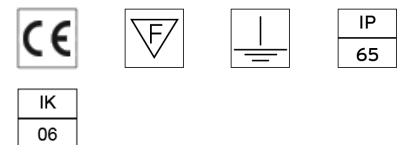




Outgraze 48 L 900 mm designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4240001 White
- F4240006 Grey
- F4240033 Anthracite
- F4240030 Black
- F4240018 Deep Brown

DIMENSIONS



CERTIFICATIONS

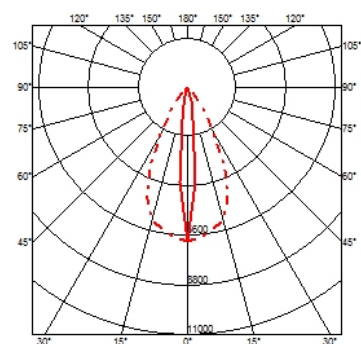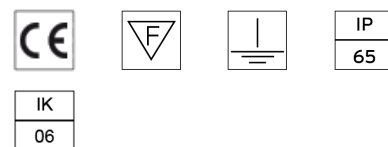

OUTGRAZE 48 L 900 MM

Insulation class	Class I
Beam angle	44°
Mounting	Ceiling surface, Wall surface
Lamps description	Power Led: 24W - 2340 lm ≠ *FIXT 1797 lm - 3000K/CRI 80 - 220-240V (*FIXT lm = Medium Optic)
Environment	Indoor, Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 48 L 900 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

● F4234001	White
● F4234006	Grey
● F4234033	Anthracite
● F4234030	Black
● F4234018	Deep Brown


ELECTRICAL

Transformer type	Electronic
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240



PHYSICAL

IK rating	06
Aiming	Fixed
Weight (kg)	3,30
Number of heads	1

DIMENSIONS



CERTIFICATIONS

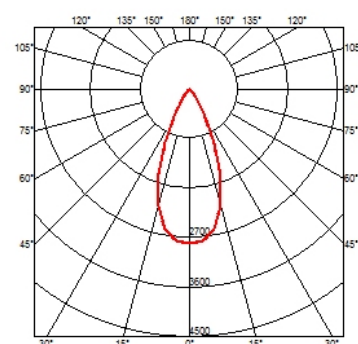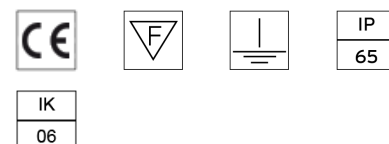




Outgraze 48 L 900 mm
designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4234001 White
- F4234006 Grey
- F4234033 Anthracite
- F4234030 Black
- F4234018 Deep Brown

DIMENSIONS



CERTIFICATIONS

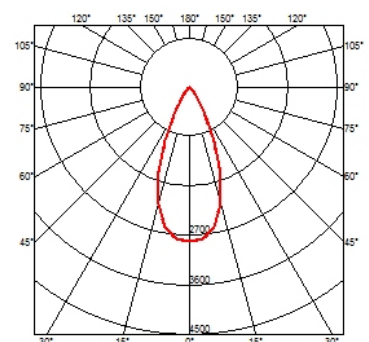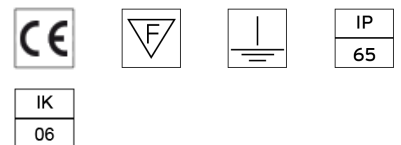

OUTGRAZE 48 L 900 MM

Insulation class	Class I
Beam angle	29°
Mounting	Ceiling surface, Wall surface
Lamps description	Power Led: 24W - 2340 lm ≠ *FIXT 1797 lm - 3000K/CRI 80 - 220-240V (*FIXT lm = Medium Optic)
Environment	Indoor, Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 48 L 900 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

● F4228001	White
● F4228006	Grey
● F4228033	Anthracite
● F4228030	Black
● F4228018	Deep Brown


ELECTRICAL

Transformer type	Electronic
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240



PHYSICAL

IK rating	06
Aiming	Fixed
Weight (kg)	3,30
Number of heads	1

DIMENSIONS



CERTIFICATIONS

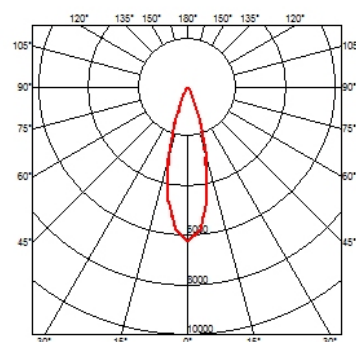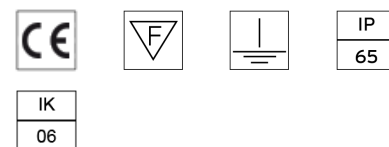




Outgraze 48 L 900 mm
designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

- F4228001 White
- F4228006 Grey
- F4228033 Anthracite
- F4228030 Black
- F4228018 Deep Brown

DIMENSIONS



CERTIFICATIONS

